

# **Retractable Downdraft Vent System**

#### PRODUCT MODEL NUMBERS

GZ7930XG GZ7936XG GZ7930XH GZ7936XH

Electrical: 120-volt, 60-Hz, AC-only, 15 amp electrical supply. Use copper wire only. A timedelay fuse or circuit breaker and separate circuit is recommended.


> 16 (40.6 cm)

9" (22.9 cm)

Diameter

(20.3 cm

### **OVERALL DIMENSIONS**

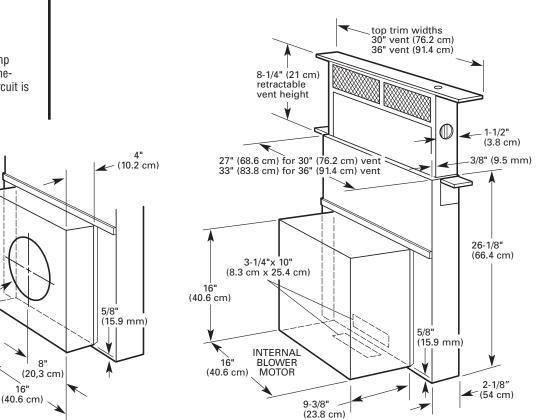

See cooktop manufacturer's instructions for cooktop cutout depth and width.

**CABINET OPENING DIMENSIONS** 

**EXTERIOR-MOUNTED** 


BLOWER MOTOR

For use with

Model No. KPEC992M

[900 cfm (25.5 m3/m)]

only

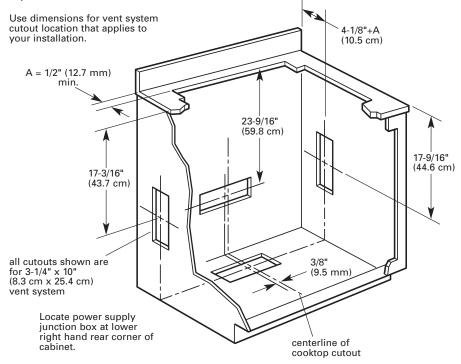

16"

Vent system cutout dimensions for internal blower models only.

Exterior mounted blower systems connect with 10" (25.4 cm) round vent. The cutout locations for this vent system will depend upon your specific installation.

## Maximum length of vent system

Vent	Length
6" (15.2 cm) round	35 feet (8.9 m)
3-1/4" x 10" (8.3 cm x 25.4 cm)	35 feet (8.9 m)

For best performance, use no more than three 90° elbows. If more than one elbow is used, make sure that there is a minimum of 24" (61 cm) of straight vent between any two elbows. Do Not install two elbows together. It is recommended that you use round vent instead of rectangular vent, especially if elbows are required. If rectangular vent is required, it should be transitioned to 6" (15.2 cm) round vent as soon as possible.

### Determining the length of system you need:

To calculate the length of system you need, add the equivalent feet for each vent piece that will be needed. See example for 6" (15.2 cm) round vent system.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com