

Transmitter Programming Procedure.

1. **FLASH** the hood pin (see on page 1) —the parking lights will stay on for up to 20 seconds.
2. Before the lights go out, turn the ignition key to the **IGNITION ON (RUN)** position and immediately to the **OFF** position.
3. Press and hold the **LOCK** button and keep it down until the parking lights flash 5 times quickly.
4. The transmitter is in its memory.
5. To exit: close the hood.

To program a transmitter on the second vehicle for multi-car operation, you must press the **TRUNK** button (instead of **LOCK** or **UNLOCK**) in step 3 of the transmitter programming procedure:

Entering Programming Options

1. **Flash the hood pin switch (see on page 1)** —the parking lights will stay on for up to 20 seconds.
2. Before the lights go out, press and hold the brake pedal and then press one of the following buttons:
LOCK to access mode 1; or
UNLOCK to access mode 2
3. The parking lights will flash and the horn will honk (if programmed) once or twice to confirm entry into a mode.
4. Release the brake pedal.

After selection the function, press one of the corresponding buttons to select the option.

LOCK	for	Option 1,
UNLOCK	for	Option 2,
TRUNK	for	Option 3.

Programming Options

MODE 1 (* indicates default setting)	
FUNCTION 1 – Ignition-controlled door locks	
OPTION 1*	Ignition-controlled door locks disabled
OPTION 2	Ignition-controlled door locks enabled
OPTION 3	Ignition-controlled door locks disabled
FUNCTION 2 – Secure Lock	
OPTION 1*	Secure Lock Disabled
OPTION 2	Secure lock enable
OPTION 3	Secure lock disabled (½-second disarm pulse)
FUNCTION 3 – Passive / Active Arming of the Starter Kill	
OPTION 1*	Starter kill passive (1-minute timeout.)
OPTION 2	Starter Kill active
OPTION 3	Starter Kill passive (3-minute timeout.)
FUNCTION 4 – Lock Pulse Duration	
OPTION 1*	7/10-second lock / unlock pulses
OPTION 2	4-second lock / unlock pulses
OPTION 3	7/10-second lock pulse and two ¼-second unlock pulses
FUNCTION 5 – Flashing LED	
OPTION 1*	Enabled (Will turn off once the engine is under ignition key control)
OPTION 2	Disabled
OPTION 3	Enabled (Must disarm starter kill in order to stop flashing)

MODE 2 (* indicates default setting)	
FUNCTION 1 – ENGINE RUN TIME	
OPTION 1	4-minute run time in gas mode / 9-minute in diesel mode.
OPTION 2*	15-minute run time in gas mode / 20-minute in diesel mode.
OPTION 3	25-minute run time in gas mode / 30-minute in diesel mode.
FUNCTION 2 – TURBO MODE	
OPTION 1	Turbo mode enabled
OPTION 2*	Turbo mode disabled
OPTION 3	Turbo mode enabled
FUNCTION 3 – ENGINE TYPE – Gas or Diesel	
OPTION 1	Diesel engine mode (in cold weather mode runtime 20 min).
OPTION 2*	Gasoline engine mode
OPTION 3	Diesel engine mode
FUNCTION 4 – AUX 1 programming	
OPTION 1	Priority door access
OPTION 2*	Horn confirmation on 2nd press of LOCK button
OPTION 3	Horn confirmation when pressing LOCK button

Diagnostics – Parking Light Flash Table

Flashes	Description	
1	<ul style="list-style-type: none"> • Doors locked, starter kill armed. • Run time has expired. • TRUNK button pressed. • Start signal received by the module. • Cold weather mode cancelled. 	
2	<ul style="list-style-type: none"> • Remote start attempt cancelled by remote. • Doors unlocked, starter kill disarmed. • Exiting ignition valet • Power-up reset 	
3	<ul style="list-style-type: none"> • Entering cold weather mode. • Entering ignition valet. 	
3 slow flashes...	...after a failed start attempt	The module did not detect a tach signal.
4	<ul style="list-style-type: none"> • +12 V detected on the brake input wire either while cranking or during run time. • Entering multi-speed tach programming. 	
5 Slow	<ul style="list-style-type: none"> • Start attempt failed because no tach signal has been programmed. 	
5 Fast	<ul style="list-style-type: none"> • Tach signal programmed. 	
6	<ul style="list-style-type: none"> • A remote start was attempted while a tach-before-crank signal was detected before cranking. 	
8	<ul style="list-style-type: none"> • Unit reset see "Resetting the Module" (p.1) 	
10	<ul style="list-style-type: none"> • A ground (-) signal was detected on the hood pin input wire. 	
1—pause— 1—pause— 5 flashes [During the transmitter programming procedure]	<ul style="list-style-type: none"> • Transmitter has been programmed. 	
1 – pause – 2	<ul style="list-style-type: none"> • There was a remote start attempt while the vehicle was in valet mode. • Failed start: vehicle's low battery voltage. 	
ON SOLID for 3 seconds....	...followed by 1 flash	Exiting cold weather mode
	...followed by 3 flashes	Entering cold weather mode
ON continuously	<ul style="list-style-type: none"> • Idle mode: Idle mode is engaged • Run time: The vehicle has been remote started and is in run time. 	
ON continuously	While the brake pedal is pressed.	<ul style="list-style-type: none"> • Confirms that cold weather mode is engaged
ON 2 seconds	<ul style="list-style-type: none"> • The hood has been opened and a ground (-) signal has been detected on the hood pin input wire. 	
ON 4 seconds	<ul style="list-style-type: none"> • Locking or unlocking a door (with Door pulses configured to 4 sec.) 	
ON 20 seconds	<ul style="list-style-type: none"> • The hood pin has been flashed and you are now in the programming centre. 	

Testing

Before putting back the vehicle together, it is recommended to check that the system operates properly. The following testing procedures should be used to verify proper installation and operation of the system. Before testing, make sure that all connections are soldered and that the unit is plugged in.

Make sure the system properly enters and exits ready mode:

Ready mode is a sequence of steps that must be followed in order to allow manual transmission vehicles to be remote started. To get in to ready mode:

1. Ensure that all the doors are closed and that the gear shift lever is in the **NEUTRAL** position.
2. With the engine already running, apply the parking brake and release the brake pedal.
Make sure to release the brake pedal.
3. Within 20 seconds, press **LOCK**, or **UNLOCK**.
The parking lights will flash 3 times quickly and remain lit.
4. Remove the key; the engine will go on running.
5. Exit the vehicle and close the door.
6. Press and hold either:
 - a. **LOCK** to lock the doors arm the alarm and shut down the engine or enter turbo mode ;
 - b. **UNLOCK** to unlock the doors and shut down the engine or enter turbo mode ;
 - c. **START/STOP** to shut down the engine without affecting the doors.

The system will exit ready mode if a door or the hood is opened, if the brake pedal is pressed, if the parking brake is disengaged or if the ignition key is turned to the **IGNITION ON (RUN)** position.

- Remote-start the engine and listen for starter drag.** If the starter cranks for too long, carry out another tach programming procedure.
- Hood switch shutdown.** With the vehicle running under the remote car starter, open the hood; the vehicle should shut down. If it does not shut down, check the hood pin-switch and its connector.
- Brake shutdown circuit.** With the vehicle running under the remote car starter, press and release the brake pedal. The engine should shut down immediately. If the engine continues to run, check the brake switch connection.
- Parking brake shutdown circuit.** With the vehicle running under the system, disengage the parking brake. The engine should shut down immediately. If the engine continues to run, check the parking brake switch connection.
- OEM alarm control.** Make sure the module is able to arm and disarm the oem alarm (if applicable).
- Door pin shutdown circuit.** Make sure the system **exits ready mode** when each door is opened while the vehicle is running under a remote start. (Test each door.)
- Door locks and trunk testing.** Make sure each of these options respond to the transmitter (if installed).
- Starter kill option.** Sit inside the vehicle with all doors closed. Arm the vehicle, then try to start the engine with the key. The engine should not start. If the engine starts, rewire the starter kill to reach proper operation.
- Valet mode.** Make sure the remote car starter is able to properly enter and exit valet mode. When setting the remote car starter into valet mode, pressing the lock button will lock the doors without activating the starter kill. (Refer to the user guide for further information on valet mode.)
- Idle mode.** Make sure the vehicle properly enters and exits idle mode.
- Most comebacks are the result of misunderstandings about how a product works or performs. Take the time to properly explain all functions and features to the customers before they leave the premises. Doing this will save time and money.**

Tach Programming


1. **Flash the hood pin (see on page 1)** — the parking lights will stay on for up to 20 seconds.
2. Before the lights go out, press and hold the brake pedal and press the **LOCK** and **UNLOCK** buttons simultaneously — the parking lights will flash 4 times. At that point, release the brake pedal.
3. Start up the engine and allow the vehicle to reach regular engine idle speed.
4. Once the engine is running idle, press the brake pedal and keep it down until you hear the parking lights output click 5 times.
5. Release the brake pedal — the tach programming is now complete.

Horn Honk Timing

Follow these steps to program horn confirmation:

1. Ensure that the hood is up and that the ignition is off.
5. Hold the hood pin down for 4 seconds.
6. Release the hood pin. The parking lights will come on.
7. While the parking lights are on, immediately push and release the hood pin again — the parking lights will stay on for up to 20 seconds.
2. Press and hold the brake pedal, then simultaneously press the **UNLOCK** and **START** buttons — the horn will chirp 5 times.
3. Release the brake pedal.
4. To change the timing:
 - a. To increase the Horn pulse by 3 ms, press the **LOCK** button.
 - b. To decrease the pulse by 3 ms, press the **UNLOCK** button.
 - c. To increase the pulse by 10 ms, press the **START** or **STOP** button.
 - d. To decrease the pulse by 10 ms, press the **TRUNK** button.
5. To save the new settings: press **LOCK** and **UNLOCK**. If 3 chirps are returned the new settings have been saved.

Supplementary Information Fifth Relay Output (2nd IGN, ACC or CRANK)

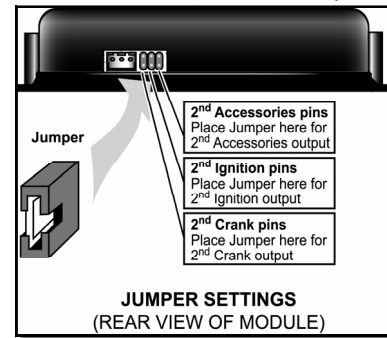


Remote car starters of this series are equipped with an on-board high-current programmable 5th relay that can be used to power a second ignition, accessory or crank wire. The unit uses 3 sets of pins; each set corresponds to a specific function of the output. In order to activate one of the three possible functions, you must place the jumper (supplied) on one of the three sets of pins and connect the 14 AWG wire to the second **IGN. / ACC. / CRANK** wire of the vehicle.

Caution!



Only one set of pins can be used at one time. Using more than one jumper may result in serious damage to the vehicle. The relay output rating on this unit is 25 a at most. Defective oem solenoid switches can sometimes draw up to 50 or 60 a, causing the 30 a fuse to blow. Always verify your circuit with an appropriate measuring device.

Tach jumper settings


Some new vehicles have a higher TACH voltage threshold, which would fall out of the normal TACH trigger circuit of the remote car starter. Changing the jumper to TACH Threshold HIGH will allow the module to properly detect the TACH signal.

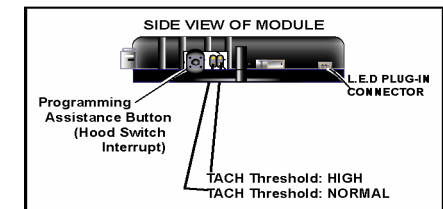






WIRING SCHEMATIC

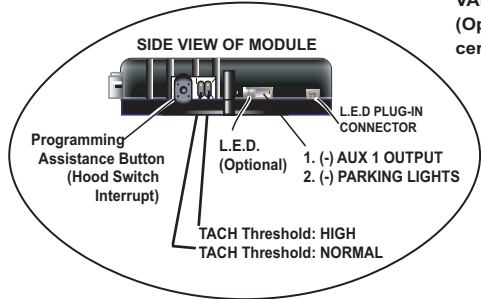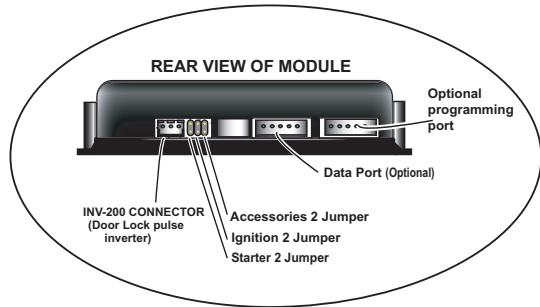

PUSH-BUTTON VALET SWITCH
(Optional on certain models)

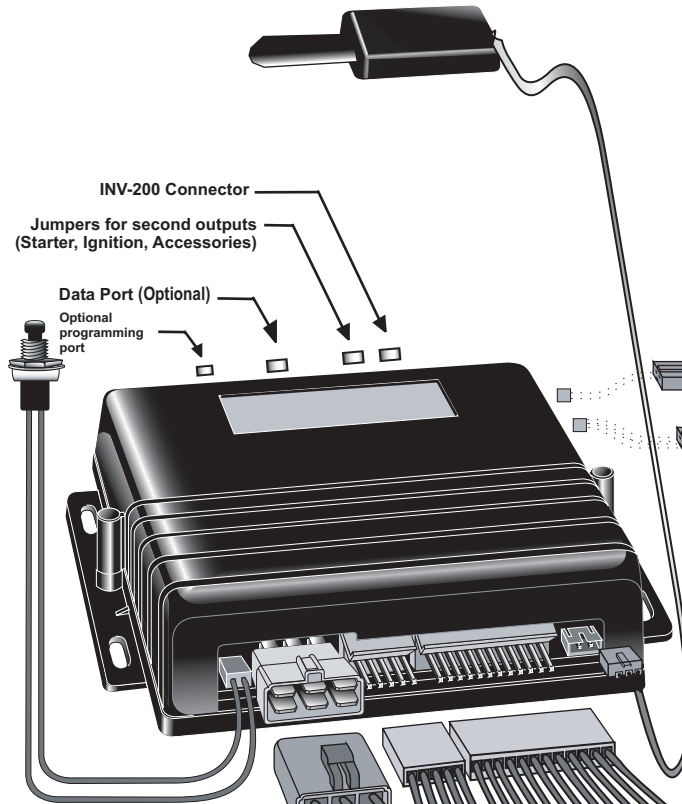

Warning: Use pliers when removing the L.E.D. connector, do not pull out the cord as you could tear off the wires from the connector, leaving the latter inside the module.

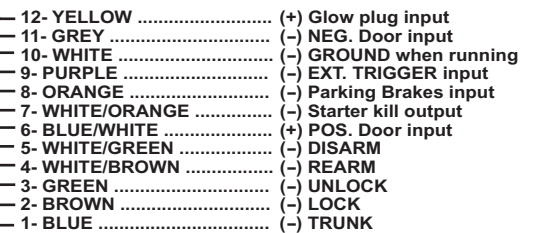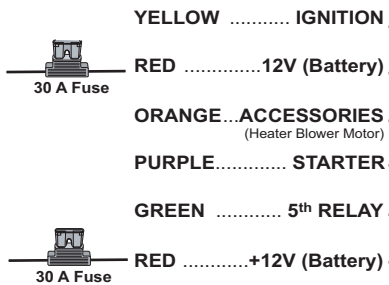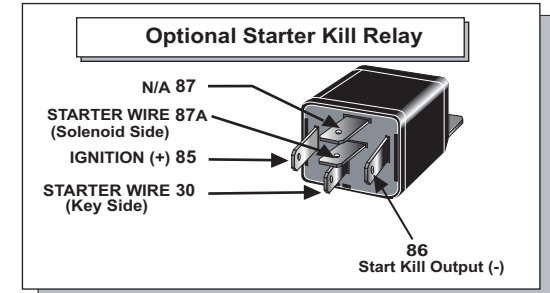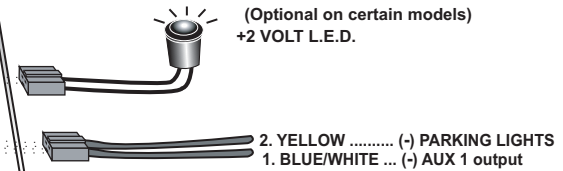

Sept. 02, 2005

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>