

HALOGEN FLOOR SHOP LIGHT

Model 30858

ASSEMBLY & OPERATING INSTRUCTIONS





3491 Mission Oaks Blvd., Camarillo, CA 93011 Visit our Web Site at www.harborfreight.com

Copyright[®] 2005 by Harbor Freight Tools[®]. All rights reserved. No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools.

For technical questions and replacement parts please call 1-800-444-3353.

THANK YOU for choosing a **HARBOR FREIGHT TOOLS** product. For future reference, please complete the owner's record below:

Model	Serial No.	Purchase Date

SAVE THE RECEIPT, WARRANTY AND THESE INSTRUCTIONS. It is important that you read the entire manual to become familiar with the unit BEFORE you begin assembly.

Technical Specifications

Power: 120 VAC, 60 Hz

Bulb Type: 500 Watt Quartz Halogen

Weight: 5-1/16 lb.

Dimensions: 8-3/4" x 8-1/4" x 12-7/8" Swivel: 180 degrees up and down

Includes: Built-in waterproof junction box and tubular steel stand

Replacement Bulbs: Harbor Freight Tools Item #4212 and #31307



IMPORTANT SAFETY INSTRUCTIONS!



READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT!

Safety Warnings and Precautions

WARNING: When using product, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment.

Read all instructions before using this product!

GENERAL SAFETY RULES

WARNING!

READ AND UNDERSTAND ALL INSTRUCTIONS
Failure to follow all instructions listed below may result in electric shock, fire, and/or serious injury.

SAVE THESE INSTRUCTIONS

WORK AREA

- 1. **Keep your work area clean and well lit.** Cluttered benches and dark areas invite accidents.
- Do not operate the Halogen Light in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust. Power tools create sparks which may ignite the dust or fumes.
- 3. **Keep bystanders, children, and visitors away while operating the Halogen Light.** Distractions can cause you to lose control.

SKU 30858

For technical questions please call 1-800-444-3353.

ELECTRICAL SAFETY

- 4. Grounded lights must be plugged into an outlet properly installed and grounded in accordance with all codes and ordinances. Never remove the grounding prong or modify the plug in any way. Do not use any adapter plugs. Check with a qualified electrician if you are in doubt as to whether the outlet is properly grounded. If the tools should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user.
- 5. Double insulated lights are equipped with a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install a polarized outlet. Do not change the plug in any way. Double insulation eliminates the need for the three wire grounded power cord and grounded power supply system.
- 6. Avoid body contact with grounded surfaces such as pipes, radiators, ranges, and refrigerators. There is an increased risk of electric shock if your body is grounded.
- 7. **Do not expose the Halogen Light to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- 8. Do not abuse the Power Cord. Never use the Power Cord to carry the light or pull the Plug from an outlet. Keep the Power Cord away from heat, oil, sharp edges, or moving parts. Replace damaged Power Cords immediately. Damaged Power Cords increase the risk of electric shock.
- 9. When operating a light outside, use an outdoor extension cord marked "W-A" or "W". These extension cords are rated for outdoor use, and reduce the risk of electricshock.

PERSONAL SAFETY

- 10. Stay alert. Watch what you are doing, and use common sense when operating the Halogen Light. Do not use the Halogen Light while tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating the light may result in serious personal injury.
- 11. Dress properly. Do not wear loose clothing or jewelry. Contain long hair. Keep your hair, clothing, and gloves away from moving parts. Loose clothes, jewelry, or long hair can be caught in moving parts.
- 12. **Avoid accidental starting. Be sure the Power Switch is off before plugging in.** Carrying the Light with your finger on the Power Switch, or plugging in the light with the Power Switch on, invites accidents.
- 13. **Remove adjusting keys or wrenches before turning the Halogen Light on.** A wrench or a key that is left attached to a rotating part of the light may result in personal injury.
- 14. **Do not overreach. Keep proper footing and balance at all times.** Proper footing and balance enables better control of the Halogen Light in unexpected situations.

SKU 30858

For technical questions please call 1-800-444-3353.

15. Use safety equipment. Always wear eye protection.

LIGHT USE AND CARE

- 16. **Do not force the Halogen Light. Use the correct light for your application.** The correct light will do the job better and safer at the rate for which it is designed.
- 17. Do not use the light if the On/Off Switch does not turn it on or off.
- 18. **Disconnect the Power Cord Plug from the power source before making any adjust- ments, changing accessories, or storing the tool.** Such preventive safety measures reduce the risk of starting the tool accidentally.
- 19. **Store the Light out of reach of children and other untrained persons.** The Halogen Light is dangerous in the hands of untrained users.
- 20. **Maintain the Light with care.** Do not use a damaged light. Tag damaged light "Do not use" until repaired.
- 21. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the light's operation. If damaged, have the light serviced before using. Many accidents are caused by poorly maintained lights.
- 22. **Use only accessories that are recommended by the manufacturer for your model.**Accessories that may be suitable for one tool may become hazardous when used on another light.

SERVICE

- 23. **Light service must be performed only by qualified repair personnel.** Service or maintenance performed by unqualified personnel could result in a risk of injury.
- 24. When servicing a light, use only identical replacement parts. Follow instructions in the "Inspection, Maintenance, And Cleaning" section of this manual. Use of unauthorized parts or failure to follow maintenance instructions may create a risk of electric shock or injury.

GROUNDING


WARNING!

Improperly connecting the grounding wire can result in the risk of electric shock. Check with a qualified electrician if you are in doubt as to whether the outlet is properly grounded. Do not modify the power cord plug provided with the Light. Never remove the grounding prong from the plug. Do not use the Light if the power cord or plug is damaged. If damaged, have it repaired by a service facility before use. If the plug will not fit the outlet, have a proper outlet installed by a qualified electrician.

GROUNDED TOOLS: TOOLS WITH THREE PRONG PLUGS


Note: The Light has a Three Prong Plug.

- 1. Tools marked with "Grounding Required" have a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet. If the Light should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. (See Figure A.)
- 2. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the tool. The green wire in the cord must be the only wire connected to the Light's grounding system and must never be attached to an electrically "live" terminal. (See Figure A.)
- 3. A grounded appliance must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances. The plug and outlet should look like those in the following illustration. (See Figure A.)

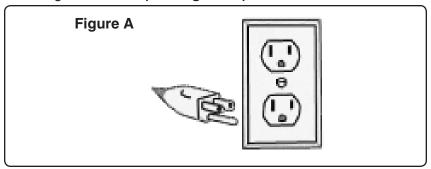

DOUBLE INSULATED APPLIANCES: APPLIANCES WITH TWO PRONG PLUGS

- 1. Appliances marked "Double Insulated" do not require grounding. They have a special double insulation system which satisfies OSHA requirements and complies with the applicable standards of Underwriters Laboratories, Inc., the Canadian Standard Association, and the National Electrical Code. (See Figure B.)
- 2. Double insulated tools may be used in either of the 120 volt outlets shown in the following illustration. (See Figure B.)

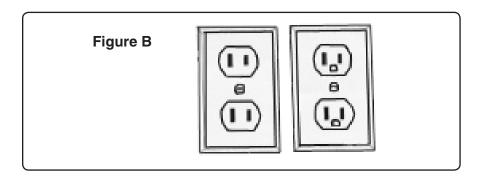

EXTENSION CORDS

- 1. **Grounded** appliances require a three wire extension cord. **Double Insulated** products can use either a two or three wire extension cord.
- 2. As the distance from the supply outlet increases, you must use a heavier gauge extension cord. Using extension cords with inadequately sized wire causes a serious drop in voltage, resulting in loss of power and possible tool damage. (See Figure C, next page.)
- 3. The smaller the gauge number of the wire, the greater the capacity of the cord. For example, a 14 gauge cord can carry a higher current than a 16 gauge cord. (See Figure C.)
- 4. When using more than one extension cord to make up the total length, make sure each cord contains at least the minimum wire size required. (See Figure C.)
- 5. If you are using one extension cord for more than one tool, add the nameplate amperes and use the sum to determine the required minimum cord size. (See Figure C.)
- 6. If you are using an extension cord outdoors, make sure it is marked with the suffix "W-A" ("W" in Canada) to indicate it is acceptable for outdoor use.
- 7. Make sure your extension cord is properly wired and in good electrical condition. Always replace a damaged extension cord or have it repaired by a qualified electrician before using it.
- 8. Protect your extension cords from sharp objects, excessive heat, and damp or wet areas.

		Figure	С		
RECOMMEN	DED MINIMU	JM WIRE GA (120 V		XTENSION (CORDS*
NAMEPLATE AMPERES (At Full Load)	EXTENSION CORD LENGTH				
	25 Feet	50 Feet	75 Feet	100 Feet	150 Feet
0 – 2.0	18	18	18	18	16
2.1 – 3.4	18	18	18	16	14
3.5 – 5.0	18	18	16	14	12
5.1 – 7.0	18	16	14	12	12
7.1 – 12.0	1	14	12	10	-
12.1 - 16.0	14	12	10	-	-
16.1 – 20.0	12	10	-	-	-
			line voltage d ne rated ampe		

SPECIFIC SAFETY RULES

- 1. WARNING! Do not mount the Halogen Light on or in any *residential* structure. Mounting in such a location creates a fire hazard that can result in property damage, severe personal injury, and/or death.
- 2. **ALWAYS point the Light away from the wall, whether the unit is in use or not.** If the light is accidentally pointed at the wall while it is on or while it is still hot when turned off, a fire may result.
- 3. Keep all flammable materials and wall hangings at least 10 feet from the mounting location.
- 4. Make sure to turn off the Halogen Light and unplug the unit from its electrical outlet when unattended.
- 5. Immediately upon turning on the Halogen Light, the Halogen Bulb become VERY hot. While operating the unit, do not touch the Halogen Bulb, or grid.
- 6. **Avoid excessive UV radiation.** Should your skin begin to feel hot while operating the Halogen Light, immediately remove yourself from the unit's light rays.
- 7. **Avoid serious eye injury.** Do not look directly into the Halogen Bulb when operating this product. Always wear ANSI approved safety goggles when working with tools and equipment.
- 8. **Do not touch the Halogen Bulb at any time.** Oil from skin will drastically shorten the bulb's life-span if not cleaned (with rubbing alcohol) before use. Handle with a soft, clean cloth instead.
- 9. Do not operate the Light with a missing or damaged Lens or Grid.
- 10. Do not operate the Halogen Light with the Grid open.
- 11. Turn off the Halogen Light, unplug its Power Cord from its 120 volt, grounded, electrical outlet, and allow it to completely cool down prior to performing any inspection, maintenance, or cleaning on the unit.
- 12. After its use, make sure to allow the Light to completely cool down before storing the unit.
- 13. Do not obstruct walkways or common areas with the cord.
- 14. The Light is weatherproof but not waterproof. Do not submerge the Light in water.

SYMBOLOGY

	Double Insulated	
(3)	Canadian Standards Association	
U _® L	Underwriters Laboratories, Inc.	
V ~	Volts Alternating Current	
Α	Amperes	
n o <u>xxxx</u> /min.	No Load Revolutions Per Minute (RPM)	

WARNING! The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

Unpacking

When unpacking the Halogen Floor Shop Light, check to make sure parts on page 10 are included. If any parts are missing or broken, please call **HARBOR FREIGHT TOOLS** at **1-800-444-3353**.

Assembly

Your Halogen Floor Shop Light will require some minor assembly. The Light requires special conditions for set up and operation. It is important that you read the entire manual to become familiar with the product BEFORE you use the Light.

- 1. Slide the Halogen Lamp onto the Steel Stand (4). Place the Mounting Bracket on the Light onto the Steel Stand (4) and thread in the Knob (1).
- Loosen the Knob (1) to pivot the Light. The Light Pivots 180 degrees up and down. To pivot the Light, move it by the Handle at the top of the Steel Stand. NEVER touch the Halogen Light to move it or pivot it.

Bulb Replacement

- 1. Make certain that the product is OFF and unplugged. With leather gloves on, squeeze and remove the Grid from the front of the Light.
- 2. Remove the Bolt from the top of the Light.
- 3. Pull out the Lens from the front of the Light.
- 4. Make certain that the Halogen Bulb (3) has had sufficient time to cool. Gently pull out the Halogen Bulb.

SKU 30858

For technical questions please call 1-800-444-3353.

5. Making certain NOT TO TOUCH the new Halogen Bulb (3), insert it into the Light <u>left side</u> first.

Do not touch the Halogen Bulb at any time. Oil from skin will drastically shorten the bulb's life-span if not cleaned (with rubbing alcohol) before use. Handle with a soft, clean cloth instead.

6. Insert the Bolt (2) and replace the Grid.

Operation

1. To turn on the Light, plug the Power Cord into a 120 volt, grounded, electrical outlet.

WARNING! Always point the light away from the wall, whether the unit is in use or not. If the unit is accidentally pointed at the wall while turned on or still hot after turned off, a fire may result.

2. Unplug the light to turn it off.

Inspection, Maintenance and Cleaning


- 1. Always unplug the Halogen Light from its electrical outlet and allow the unit to completely cool down before performing any inspection, maintenance, or cleaning.
- Before each use: Inspect the general condition of the Halogen Light. Check for
 misalignment or binding of moving parts, cracked or broken parts, damaged Power Cord,
 damaged Grid, Lens and any other condition that may affect its safe operation. If a problem
 occurs with the Light, have the problem corrected before further use. Do not use damaged
 equipment.

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS DIAGRAM INTHIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER NOR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Parts List

Part	Description	Q'ty
1	Knob	1
2	Bolt	1
3	Halogen Bulb	1
4	Steel Stand	1
5	Light Housing w/cord	1
6	Grid	1

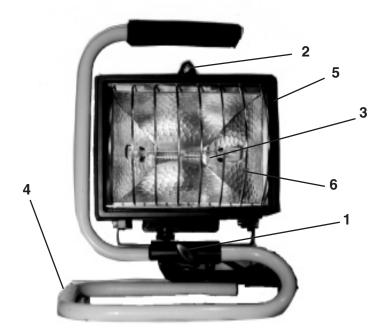

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com