



XK50 Keyboard Amplifier



User's Guide



XK50 Keyboard Amplifier


Congratulations!

You are now the proud owner of the Crate XK50 keyboard amplifier. This compact powerhouse features a 12" Crate Custom woofer and a Piezo tweeter housed in a ported tuned enclosure. Each of its two input jacks has its own level control so you can mix your keyboard with another instrument or a high-Z mic. The CD input jacks allow you to play along with your favorite music. The Insert jack allows you to connect external effects to the amp and doubles as a line out jack to send a signal to a recorder, mixing board or house PA. The headphones jack allows for private practice sessions.


The XK50's angled cabinet allows you to use it as an upward projecting floor monitor or stand it upright like a conventional amplifier.

Like all Crate products, your XK50 is designed by musicians, and built using only the best components. Extensive testing at the hands (and ears) of skilled technicians and musicians insures you that this amplifier is the absolute best it can be.

In order to get the most out of your new amplifier, we strongly urge you to go over the information contained in this manual before you begin playing.

And **thank you** for choosing 

System Block Diagram:

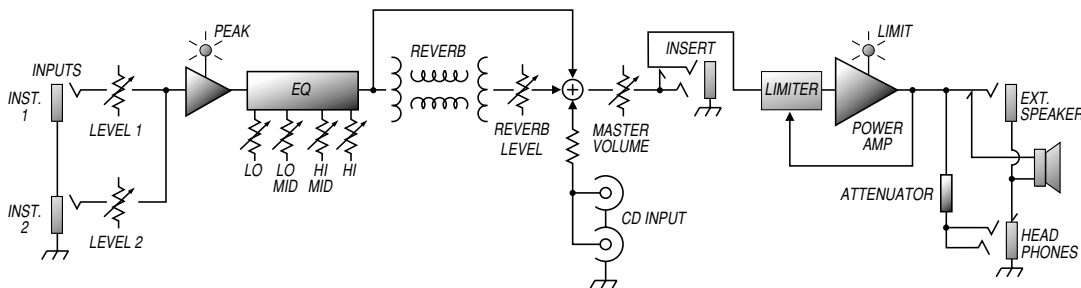

 CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN	 PRECAUCION RIESGO DE CORRIENTAZO NO ABRA	 ATTENTION RISQUE D'ELECTROCUTION NE PAS OUVRIR
WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE. TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER. NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.	PRECAUCION: PARA REDUCIR EL RIESGO DE INCENDIOS O DESCARGAS ELECTRICAS, NO PERMITA QUE ESTE APARATO QUEDE EXPUESTO A LA LLUVIA O LA HUMEDAD. PARA DISMINUIR EL RIESGO DE CORRIENTAZO, NO ABRA LA CUBIERTA. NO HAY PIEZAS ADENTRO QUE EL USUARIO PUEDE REPARAR DEJE TODO MANTENIMIENTO A LOS TECNICOS CALIFICADOS.	ATTENTION: PROTEGEZ CET APPAREIL DE LA PLUIE ET DE L'HUMIDITE AFIN D'EVITER TOUT RISQUE D'INCENDIE OU D'ELECTROCUTION. POUR REDUIRE D'ELECTROCUTION NE PAS ENLEVER LE COUVERCLE. AUCUNE PIECE INTERNE N'EST REPARABLE PAR L'UTILISATEUR. POUR TOUTE REPARATION, S'ADRESSEZ A UN TECHNICIEN QUALIFIE.

IMPORTANT SAFETY INSTRUCTIONS

- READ, FOLLOW, HEED, AND KEEP ALL INSTRUCTIONS AND WARNINGS.
- DO NOT OPERATE NEAR ANY HEAT SOURCE AND DO NOT BLOCK ANY VENTILATION OPENINGS ON THIS APPARATUS. FOR PROPER OPERATION, THIS UNIT REQUIRES 3" (75mm) OF WELL VENTILATED SPACE AROUND HEATSINKS AND OTHER AIR FLOW PROVISIONS IN THE CABINET.
- DO NOT USE THIS APPARATUS NEAR SPLASHING, FALLING, SPRAYING, OR STANDING LIQUIDS.
- CLEAN ONLY WITH LINT-FREE DAMP CLOTH AND DO NOT USE CLEANING AGENTS.
- ONLY CONNECT POWER CORD TO A POLARIZED, SAFETY GROUNDED OUTLET WIRED TO CURRENT ELECTRICAL CODES AND COMPATIBLE WITH VOLTAGE, POWER, AND FREQUENCY REQUIREMENTS STATED ON THE REAR PANEL OF THE APPARATUS.
- PROTECT THE POWER CORD FROM DAMAGE DUE TO BEING WALKED ON, PINCHED, OR STRAINED.
- UNPLUG THE APPARATUS DURING LIGHTNING STORMS OR WHEN UNUSED FOR LONG PERIODS OF TIME.
- ONLY USE ATTACHMENTS, ACCESSORIES, STANDS, OR BRACKETS SPECIFIED BY THE MANUFACTURER FOR SAFE OPERATION AND TO AVOID INJURY.
- WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK OR FIRE, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.
- SERVICE MUST BE PERFORMED BY QUALIFIED PERSONNEL.
- OUR AMPLIFIERS ARE CAPABLE OF PRODUCING HIGH SOUND PRESSURE LEVELS. CONTINUED EXPOSURE TO HIGH SOUND PRESSURE LEVELS CAN CAUSE PERMANENT HEARING IMPAIRMENT OR LOSS. USER CAUTION IS ADVISED AND EAR PROTECTION IS RECOMMENDED IF UNIT IS OPERATED AT HIGH VOLUME.



EXPLANATION OF GRAPHICAL SYMBOLS:

EXPLICACION DE SIMBOLOS GRAFICOS:

EXPLICATION DES SYMBOLES GRAPHIQUES:



"DANGEROUS VOLTAGE"

"VOLTAJE PELIGROSO"

"DANGER HAUTE TENSION"




"IT IS NECESSARY FOR THE USER TO REFER TO THE INSTRUCTION MANUAL"

"ES NECESARIO QUE EL USUARIO SE REFIERA AL MANUAL DE INSTRUCCIONES."

"REFERREZ-VOUS AU MANUAL D'UTILISATION"



XK50 Keyboard Amplifier

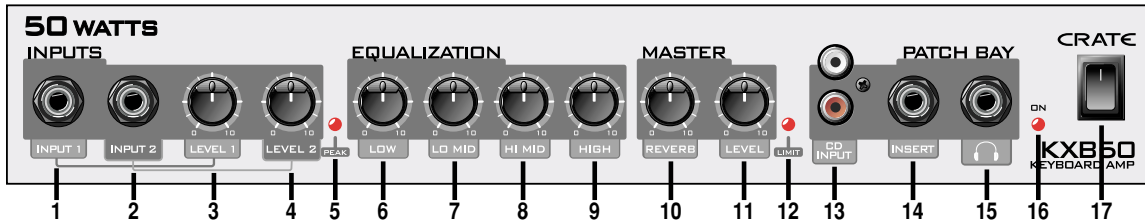

1. INPUT 1: Use this 1/4" jack to connect your keyboard or other line level signal to the amplifier by means of a shielded instrument cable. The signal level at this jack is controlled by the Level 1 knob (#3).

2. INPUT 2: Use this 1/4" jack to connect your keyboard or other line level signal to the amplifier by means of a shielded instrument cable. The signal level at this jack is controlled by the Level 2 knob (#4).

3. LEVEL 1: Use this control to adjust the level of the signal connected to the Input 1 jack (#1).

4. LEVEL 2: Use this control to adjust the level of the signal connected to the Input 2 jack (#2).

5. PEAK: This LED illuminates when the input signal level nears clipping. For the best signal to noise ratio, adjust the Level controls until this LED flashes on strong signal peaks.

6. LOW: Use this control to adjust the bass response of the amplifier. Rotating the control counterclockwise reduces the low frequency output. Rotating the control clockwise increases the low frequency output.

7. LO MID: Use this control to adjust the "thickness" or "fatness" of the amplifier. Rotating the control counterclockwise reduces the lower midrange frequency output. Rotating the control clockwise increases the lower midrange frequency output.

8. HI MID: Use this control to adjust the clarity and definition of the amplifier. Rotating the control counterclockwise reduces the upper midrange frequency output. Rotating the control clockwise increases the upper midrange frequency output.

9. HIGH: Use this control to adjust the high frequency response of the amplifier. Rotating the control counterclockwise reduces the high frequency output. Rotating the control clockwise increases the high frequency output.

10. REVERB: Use this control to adjust the amount of reverberation added to the signal. With the control fully counter clockwise, the signal is dry - no reverb added. As you rotate the control clockwise the amount of reverb added increases.

11. LEVEL: Use this control to adjust the overall output signal of the amplifier.

12. LIMIT: The XK50 employs an internal limiter circuit to help prevent overdriving the output signal. This LED illuminates when the limiter circuit is activated. During normal playing conditions, this LED will flash occasionally. If this LED remains illuminated, reduce the level controls.

13. CD INPUT: Use these RCA jacks to connect the output from a CD player or tape deck to the amplifier. The signal at these jacks is combined into a mono signal which is sent to the internal power amp circuit. Use the CD or tape player's output level control to adjust the signal for the proper mix with your instrument.

14. INSERT: Use this jack to connect external effects to the amplifier. This is a stereo R/T/S 1/4" jack: ring = line out, tip = line in, sleeve = ground. This jack can also provide a line out signal - insert a mono T/S 1/4" plug half way into the jack to obtain the signal. (This will not interrupt the signal going into the internal power amp.)

15. (HEADPHONES): Use this jack to connect headphones to the amplifier. The internal speakers are disconnected when this jack is used.

CAUTION: To avoid possible damage to your hearing, do not use headphones for extended periods of time at extremely loud levels.

16. ON: This LED illuminates when the amplifier is turned on.

17. POWER: Use this switch to turn the amplifier on (top of the switch depressed) and off (bottom of the switch depressed).

18. POWER CORD (rear panel, not shown): The grounded power cord should only be plugged into a grounded power outlet that meets all applicable electrical codes and is compatible with the voltage, power, and frequency requirements stated on the rear panel. **Do not attempt to defeat the safety ground connection.**



XK50 Keyboard Amplifier

XK50 TECHNICAL SPECIFICATIONS:

Output Power Rating	50 watts RMS @ 2% THD, 8 ohm load – 120 VAC line
Gain	50dB, tones at 12:00 @ 1kHz
Tone Control Range	Low: 18dB @ 50Hz Lo Mid: 21dB @ 150Hz Hi Mid: 16dB @ 1kHz High: 29dB @ 10kHz
Input Impedance	10k ohms
Maximum Signal Accepted	10 volts peak to peak
Insert Jack	Line Output (Max): 2.5 volts peak to peak Line Input (Max): 2.5 volts peak to peak
Speaker Size and Rating	Crate Custom Design 12" w/ 1.5" voice coil, 30 oz. magnet; power handling 100 watts Piezo Tweeter; power handling 150 watts
Cabinet Type	Port Tuned enclosure
Input Power Requirements	120 VAC, 60Hz, 85VA 100/110 VAC, 50/60Hz, 85VA 230 VAC, 50/60Hz, 85VA
Cabinet Size and Weight	21.5" H x 17.5" W x 15" D, 39.5 lbs.

Declaration of Conformity

Manufacturer's Name: SLM Electronics

Corporate Headquarters: 1901 Congressional Drive, St. Louis, Missouri 63146

Primary Production Facility: 700 Hwy 202 W, Yellville, Arkansas, 72687

Product Type: Audio Amplifier

Products meet the regulations for compliance marking under:

ETL standards UL6500, UL60065, or UL813

CSA standards E60065 or C22.2 No.1-M90


CE safety standard EN60065

CE EMC standards EN55103 or EN55013 and EN61000

C-tick designation Level 2, ABN #56748810738, ARBN# N222

KETI standard K60065 (limited model approval)

Compliance Support Contact: SLM Electronics, Attn: R&D Compliance Engineer
1901 Congressional Drive, St Louis, Missouri, 63146 • Tel.: 314-569-0141, Fax: 314-569-0175



www.crateamps.com



©2004 SLM ELECTRONICS, A DIVISION OF ST. LOUIS MUSIC, 1400 FERGUSON, ST. LOUIS, MO. U.S.A. 63133
P/N 47-385-02 • 102504

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>