


Electro-Voice®

a MARK IV company

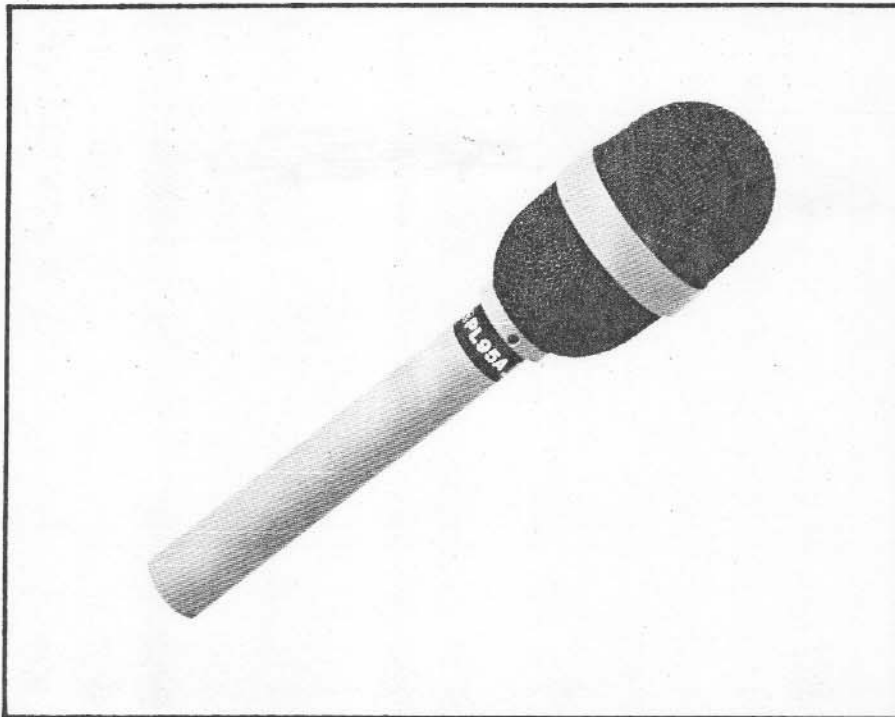

Model PL95A

Dynamic Cardioid Vocal Microphone

SPECIFICATIONS

Element:
Dynamic

Frequency Response:
60 to 17,000 Hz

Polar Pattern:
Cardioid

Impedance:
Lo-Z, 150 ohms balanced

Output Level:
-60 dB
(0 dB = 1 mW/10 dynes/cm²)

Pop Filter:
Built-in Acoustifoam™

Grille Screen Material:
Memraflex (tempered spring steel)

Case Material:
Steel

Finish:
Snow gray and charcoal

Dimensions:
184 mm (7.25 in.) long,
48 mm (1.88 in.) maximum dia.,
19 mm (.75 in.) shank dia.

Net Weight:
261 g (9.2 ounces)

Accessories Included:
310 stand clamp
Vinyl carrying case

Optional Accessories:
312 clamp
380 attenuator
PLC-25-T cable
PLC-25-X cable
PLC-25-P cable
541 cable
542 cable
543 cable
544 cable

DESCRIPTION AND APPLICATIONS

The Electro-Voice Model PL95A is the best dynamic cardioid vocal mike EV makes. Not only does it have a superb appearance, it also has superb performance and it is typically EV rugged. It is the best dynamic you can buy to control those unwanted feedback problems you so often encounter. It has the bass boost you want when used close up. Handling noise and cable noise is successfully minimized by a very sophisticated shock suspension system.

Feedback in live entertainment situations is caused by sound being reflected off walls, speaker systems, amps, mixers, etc. back into the microphone. Microphones and speaker systems that exhibit peaked frequency response curves tend to trigger a feedback situation. Feedback problems can be minimized by using microphone and speaker systems that exhibit an overall smooth, peak free frequency response. The pro-line family of Electro-Voice microphones have an overall smoothness of frequency response that helps significantly to control feedback problems. Feedback problems can be further minimized by using close miking techniques on all microphones used whether they be instrument microphones or vocal microphones. Close miking techniques help reduce feedback because the microphone's signal to the amplifier is at a maximum in this condition and the amplifier's gain setting can be reduced appreciably. This yields a significant reduction of back-ground and reflected sound to the entertainer's voice giving more system sound output before feedback.

WARRANTY (Limited) —

Electro-Voice Pro-Line Microphones (excluding Model PL88) are guaranteed unconditionally against malfunction from any cause for a period of two years from date of original purchase. Also, these microphones are guaranteed without time limit against malfunction in the acoustic system due to defects in workmanship and materials. If such malfunction occurs microphone will be repaired or replaced (at our option) without charge for materials or labor if delivered prepaid to the proper Electro-Voice service facility. Unit will be returned prepaid. (Any active electronics incorporated in a microphone are guaranteed for three years from date of original purchase against such malfunction.) Warranty does not cover finish, appearance items, cable, cable connectors, or switches. Defect guarantee does not cover malfunction due to abuse or operation at other than specified conditions. Repair by other than Electro-Voice or its authorized service agencies will void this guarantee.

The PL88 is guaranteed for two years from date of original purchase against defects in workmanship and materials. For repair information and service locations, please write: Service Dept., Electro-Voice, Inc., 600 Cecil Street, Buchanan, Michigan 49107 (Phone: 616/695-6831) or Electro-Voice West, 8234 Doe Avenue, P.O. Box 3297, Visalia, CA 93277 (Phone: 209/651-7777).

Electro-Voice also maintains complete facilities for non-warranty service of EV products.

Specifications subject to change without notice.

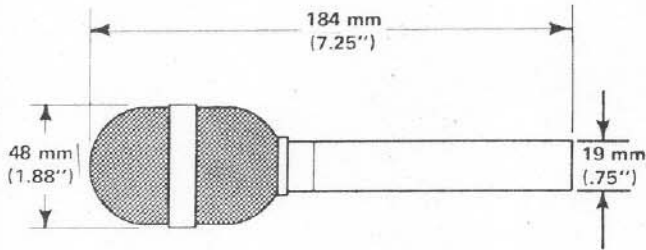


FIGURE 1 – Dimensions

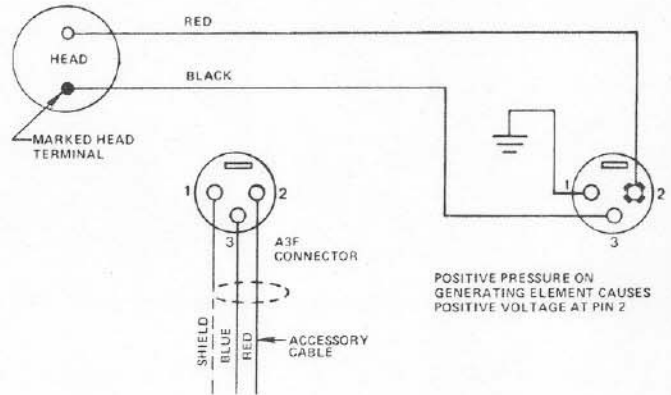


FIGURE 2 – Wiring Diagram

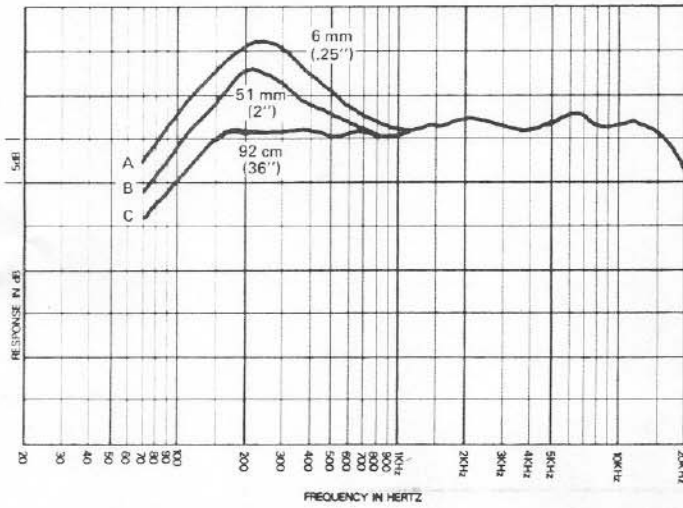


FIGURE 3 – Frequency Response

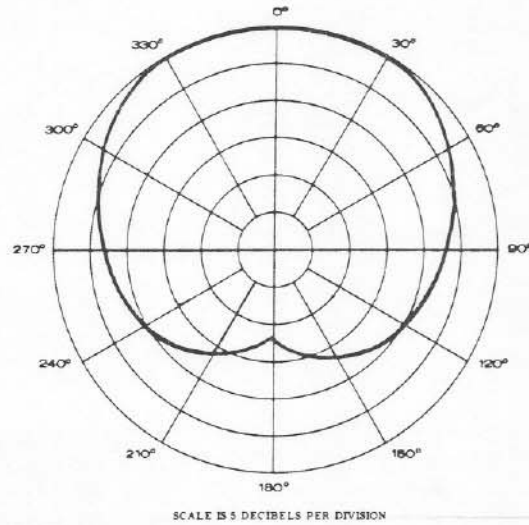


FIGURE 4 – Polar Response

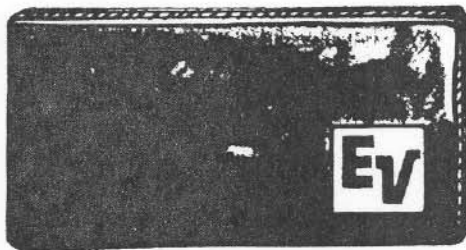


FIGURE 5 – Vinyl Carrying Bag

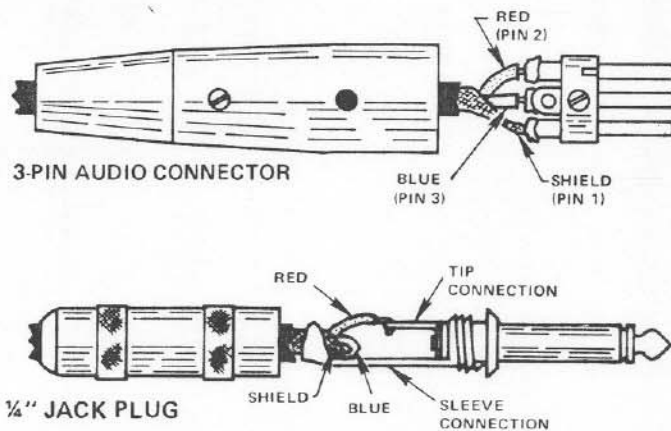


FIGURE 6 – 3-Pin Connector & 1/4" Jack Plug Wiring Connections



ELECTRO-VOICE, INC., 600 Cecil Street, Buchanan, Michigan 49107
 MANUFACTURING PLANTS AT ■ BUCHANAN, MI ■ NEWPORT, TN ■ SEVIERVILLE, TN ■ REDMOND, WA ■ GANANOQUE, ONT.
 ©Electro-Voice, Inc. 1987 ■ Litho In U.S.A. Part Number 530072-412

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>