

165 CA1

6" Access 1 (Aftersales Dpt ref: 6 CA1)

- Adjustable aluminum inverted dome tweeter
- All weather woven glass fiber cone
- Voice coil cooling system




Specifications

| | | |
|----------------|----------------------|-----------------|
| Nominal power | 60 W | |
| Maximum power | 120 W | |
| Sensitivity | 92 dB | |
| Cone | Braided glass fiber® | |
| Surround | Butyl | |
| Nom. impedance | 4 ohms | |
| DC resistance | 3.5 ohms | |
| VC diameter | 25 mm | |
| VC height | 11 mm | |
| Former | Kapton® | |
| Layers | 2 | |
| Wire | Copper | |
| Inductance | | |
| Xmax | 2.5 mm | 1/16 in |
| Magnet d x h | 85 x 15 mm | 3-1/3 x 9/16 in |
| Magnet weight | 0.35 kg | 0.66 lb |
| Flux density | 1.3 T | |
| Gap height | 5.5 mm | 3/16 in |
| Net weight | 0.85 kg | 1.87 lb |

Parameters

| | | |
|-----|-----------------------------|--|
| Fs | 79.28 Hz | |
| Vas | 7.44 l | |
| Qts | 0.92 | |
| Qes | 1.04 | |
| Qms | 7.94 | |
| Re | 3.54 ohms | |
| Sd | 137 cm ² | |
| Cas | 6.04 E-08 m ⁵ /N | |
| Mas | 66.75 kg/m ⁴ | |
| Ras | 4187.53 ohms.ac | |
| Cms | 3.22E-04 m/N | |
| Mms | 12.5 g | |
| Rms | 0.784 kg/s | |
| Ces | 596.52 mF | |
| Les | 6.76 mH | |
| Res | 26.72 ohms | |
| Bl | 4.58 N/A | |
| SPL | 87.93 dB/W/m | |


Frequency Response / Impedance

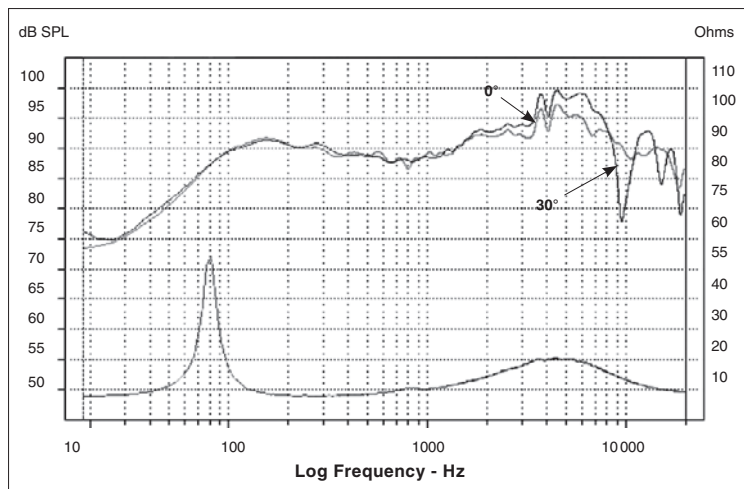

Suggested application

| Load | V (l) | Fb (Hz) | F-3 (Hz) | Ql |
|--------|-------|---------|----------|------|
| Sealed | 30 | - | 68 | 1.02 |
| Sealed | - | - | - | - |
| Sealed | - | - | - | - |

Mechanical Drawing

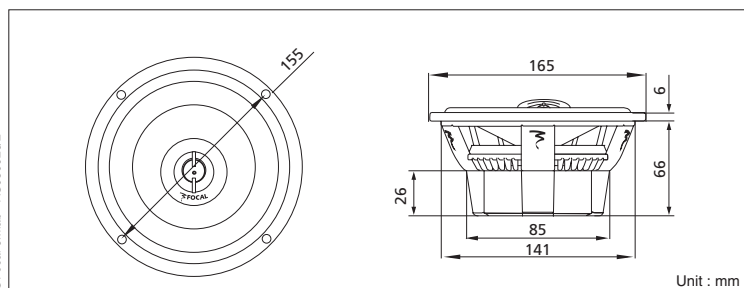

©Focal-JMLab - AS050926/2

Focal® est une marque de Focal-JMLab® - BP 374 - 108, rue de l'Avenir - 42353 La Taubaudière cedex France - Tél. (33) 04 77 43 57 00 - Fax (33) 04 77 37 65 87 - www.focal-fr.com - SCSD050727/1



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>