
# USE & CARE MANUAL

THIS AIR CONDITIONER IS EQUIPPED WITH A NEW INDUSTRY STANDARD POWER SUPPLY CORD WITH A TEST-RESET FUNCTION

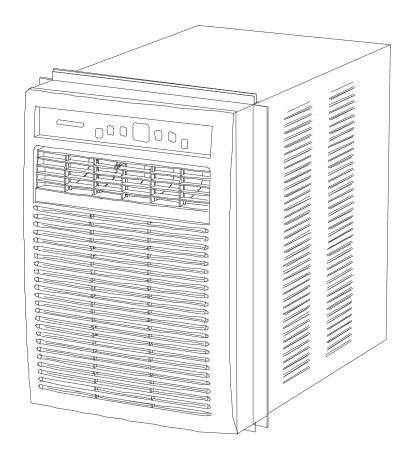

READ AND SAVE THESE INSTRUCTIONS

# **AIR CONDITIONER**

3 SPEED ELECTRONIC CONTROL

P/N819042059-01

# ROOM AIR CONDITIONER WARRANTY

# Your product is protected by this warranty

Your appliance is warranted by Electrolux. Electrolux has authorized Frigidaire Consumer Services and their authorized servicers to perform service under this warranty. Electrolux authorizes no one else to change or add to any of these obligations under this warranty. Any obligations for service and parts under this warranty must be performed by Frigidaire Consumer Services or an authorized Frigidaire servicer.

	WARRANTY	FRIGIDAIRE, THROUGH ITS AUTHORIZED SERVICERS, WILL	THE CONSUMER WILL BE RESPONSIBLE FOR:
FULL ONE-YEAR WARRANTY	One year fromoriginal purchase date.	Pay all costs for repairing or replacing parts of this appliance which prove to be defective in materials or workmanship.	NORMAL RESPONSIBILITIES OF THE
LIMITED 2-5 YEAR WARRANTY (Sealed system)		Repair or replace any parts in the Sealed Refrigeration System (compressor, condenser, evaporator and tubing) proves to be defective in materials or workmanship.	transportation and reinstallation costs which are required because of service.
LIMITED WARRANTY (Applicable to the State of Alaska)	Timo ponodo notod		Costs of the technician's travel to the home and any costs for pick up and delivery of the appliance required because of service.

#### \*NORMAL **RESPONSIBILITIES** OF THE CONSUMER

# This warranty applies only to products in ordinary household use, and the consumer is responsible for the items listed below.

- 1. Proper use of the appliance in accordance withinstructions provided with the product.
- 2. Proper installation by an authorized servicer in accordance with instructions provided with the appliance and inaccordance with alllocal plumbing, electrical and/or gas codes.
- 3. Proper connection to a grounded power supply of sufficient voltage, replacement of blown fuses, repair of loose connections or defects in house wiring.
- 4. Expenses for making the appliance accessible for servicing, such as removal of trim, cupboards, shelves, etc., which are not apart of the appliance when it was shipped from the factory.
- 5. Damages to finish after installation.

#### **EXCLUSIONS**

- This warranty does not cover the following:

  1. CONSEQUENTIAL OR INCIDENTAL DAMAGES SUCH AS PROPERTY DAMAGE AND INCIDENTAL EXPENSES RESULTING FROMANY BREACH OF THIS WRITTEN ORANY IMPLIED WARRANTY. Note: Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation or exclusion may not apply to you.
- 2. Service calls which do not involve malfunction or defects in workmanship or material, or for appliances not in ordinary household use. The consumer shall pay for such service calls.
- 3. Damages caused by services performed by persons other than authorized Frigidaire servicers; use of parts other than Frigidaire Genuine Renewal Parts; obtained from persons other than such servicers; or external causes such as abuse, misuse, inadequate power supply or acts of God.
- 4. Products with original serial numbers that have been removed or altered and cannot be readily determined.

IF YOUNEED SERVICE Keep your bill of sale, delivery slip, or some other appropriate payment record. The date on the bill establishes the warranty period should service be required. If service is performed, it is in your best interest to obtain and keep all receipts. This written warranty gives you specific legal rights. You may also have other rights that vary from state to state. Service under this warranty must be obtained by following these steps, in order:

- 1. Contact Frigidaire Consumer Services or an authorized Frigidaire servicer.
- 2. If there is a question as to where to obtain service, contact our Consumer Relations Department at:

Frigidaire P.O. Box 212378 Augusta, GA 30917 800-444-4944

Product features or specifications as described or illustrated are subject to change without notice. All warranties are made by Electrolux. This warranty applies only in the 50 states of the U.S.A., Puerto Rico and Canada.

## **Product Registration**

#### **Record Your Model and Serial Numbers**

Record in the space provided below the model and serial numbers. On all models, the serial plate is located on the outside of the cabinet.

**Model Number** 

**Serial Number** 

### **Register Your Product**


The self-addressed PRODUCT REGISTRATION CARD should be filled in completely, signed and returned to the Frigidaire Company.

### **Contents**

NOTE: This USE & CARE MANUAL provides specific operating instructions for your model. Use the room air conditioner only as instructed in this USE & CARE MANUAL. These instructions are not meant to cover every possible condition and situation that may occur. Common sense and caution must be practiced when installing, operating, and maintaining any appliance.

- 2 Warranty
- 3 Product Registration
- 3 Normal Sounds
- 4 Important Safety Instructions
- 4 Energy Saving Ideas
- 5 Operation of Current Device
- 5-9 Air Conditioner Features
- 10 Care and Cleaning
- 11 Avoid Service Checklist

#### **Normal Sounds**




High Pitched Chatter
Today's high efficiency compressors

Today's high efficiency compressors may have a high pitched chatter during the cooling cycle.

#### Vibration

Unit may vibrate and make noise because of poor wall or window construction or incorrectinstallation.

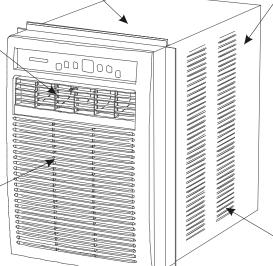

Gurgle/Hiss

"Gurgling or hissing" noise may be heard due to refrigerant passing through the evaporator during normal operation.

Pinging or Swishing

Droplets of water hitting the condenser during normal operation may cause "pinging or swishing" sounds.

# Important Safety Instructions


⚠ NOTE The power supply cord with this air conditioner contains a current detection device designed to reduce the risk of fire.

Please refer to the section 'Operation of Current Device' for details.

In the event that the power supply cord is damaged, it cannot be repaired it must be replaced with a cord from the Product Manufacturer.

AWARNING Avoid fire hazard or electric shock. Do not use an extension cord or an adaptor plug. Do not remove any prong from the power cord.

# Grounding type wall receptacle



Do not, under any circumstances, cut, remove, or bypass the grounding prong,

Power supply cord with 3-prong grounding plug and current detection device

#### Read all instructions before using this air conditioner.

### **AWARNING** For Your Safety

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance. Read product labels for flammability and other warnings.

## **AWARNING** Prevent Accidents

To reduce the risk of fire, electrical shock, or injury to persons when using your air conditioner, follow basic precautions, including the following:

- Be sure the electrical service is adequate for the model you have chosen. This information can be found on the serial plate, which is located on the side of the cabinet and behind the grille.
- If the air conditioner is to be installed in a window, you will probably
  want to clean both sides of the glass first. If the window is a
  triple-track type with a screen panel included, remove the screen
  completely before installation.
- Be sure the air conditioner has been securely and correctly installed according to the separate installation instructions provided with this manual. Save this manual and the installation instructions for possible future use in removing or reinstalling this unit.
- When handling the air conditioner, be careful to avoid cuts from sharp metal fins on front and rear coils.

# **AWARNING** Electrical Information

The complete electrical rating of your new room air conditioner is stated on the serial plate. Refer to the rating when checking the electrical requirements.

- Be sure the air conditioner is properly grounded. To minimize shock and fire hazards, proper grounding is important. The power cord is equipped with a three-prong grounding plug and a current leakage detection device for protection against shock & fire hazards.
- Your air conditioner must be used in a properly grounded wall receptacle. If the wall receptacle you intend to use is not adequately grounded or protected by a time delay fuse or circuit breaker, have a qualified electrician install the proper receptacle.
- Do not run air conditioner with outside protective cover in place. This could result in mechanical damage within the air conditioner.
- · Do not use an extension cord or an adapter plug.

# **Energy Saving Ideas**



- Do not blockinside air flow with blinds, curtains or furniture; or outside with shrubs, enclosures, or other buildings.
- The capacity of the room air conditioner must fit the room size for efficient and satisfactory operation.
- Install the room air conditioner on the shady side of your home. A
  window that faces north is best because it is shaded most of the day.
- Close the fireplace damper, floor and wall registers so cool air does not escape up the chimney and into the duct work.
- Keep blinds and drapes in other windows closed during the sunniest part of the day.
- Clean the air filter as recommended in the section "Care and Cleaning"
- Proper insulation and weather stripping in your home will help keep warm air out and cool air in.
- External house shading with trees, plants or awnings will help reduce the air conditioner work load.
- Operate heat producing appliances such as ranges, washers, dryers and dishwashers during the coolest part of the day.

**AWARNING** To reduce the risk of fire, electric shock, orinjury to persons, read the IMPORTANT SAFETY INSTRUCTIONS before operating this appliance.

# Operation of Current Device

The power supply cord contains a current device that senses damage to the power cord. To test your power supply cord do the following:

- 1. Plug in the Air Conditioner.
- 2. The power supply cord will have TWO buttons on the plug head. Press the TEST button. You will notice a click as the RESET button pops out.
- 3. Press the RESET button. Again you will notice a click as the button engages.
- 4. The power supply cord is now supplying electricity to the unit. (On some products this is also indicated by a light on the plug head).

#### NOTES:


- Do not use this device to turn the unit on or off.
- Always make surethe RESET button is pushed in for correct operation.
- The power supply cord must be replaced if it fails to reset when either the TEST button is pushed, or it can not be reset. A new one can be obtained from the product manufacturer.
- If power supply cord is damaged, it CANNOT be repaired. It MUST be replaced by one obtained from the product manufacturer.


# Air Conditioner Features

#### **ELECTRONIC CONTROL OPERATING INSTRUCTIONS**

Before you begin, thoroughly familiarize yourself with the control panel and remote as shown below and all its functions, then follow the symbol for the functions you desire. The unit can be controlled by the control panel alone or with the remote.

#### **CONTROL PANEL**

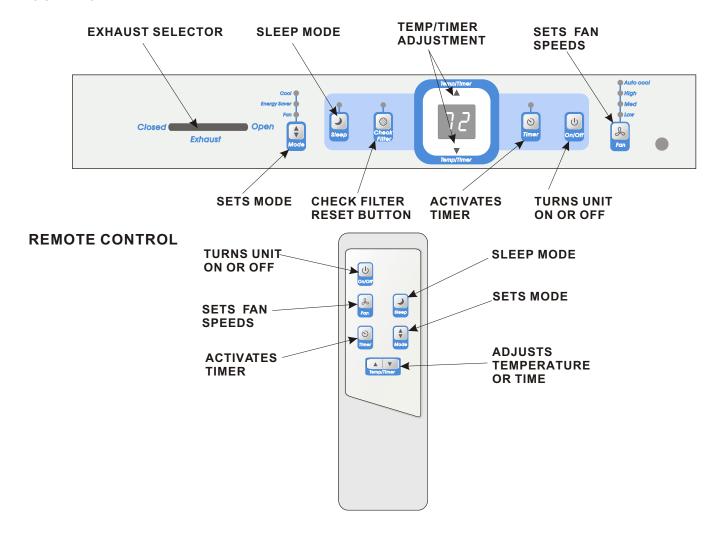


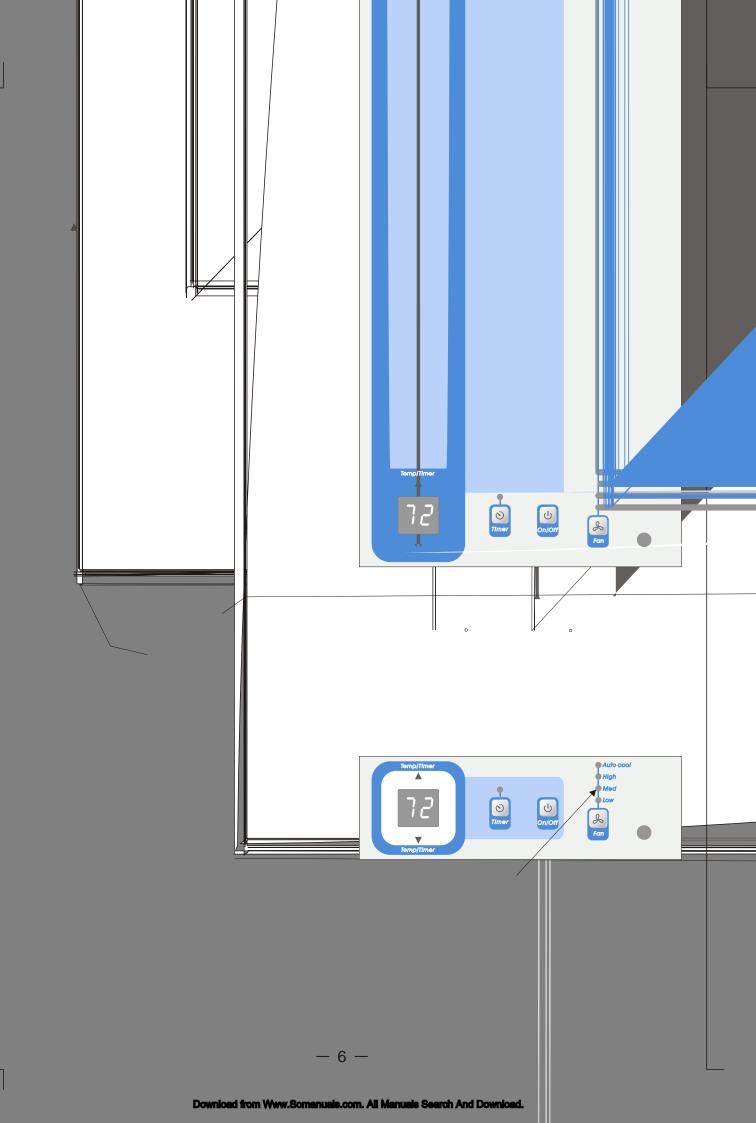

### Air Conditioner features

(continued)

#### TO USE AUTO COOL FEATURE:

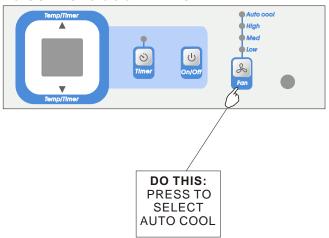


#### YOU WILL SEE:



#### **LIGHT ON**

NOTE: Fan starts at High Speed and adjusts to a slower speed as the room temperature dictates. For example if the room does not get too warm, it will stay at the slowest speed. If the room temperature rises quickly, such as a door being opened, it will automatically go to the highest speed. The fan speeds will re-adjust back to the slowest speed as the room returns to the original set temperature. Press the fan button to adjust the fan speed manually.

#### TO OPERATE ON FAN ONLY:

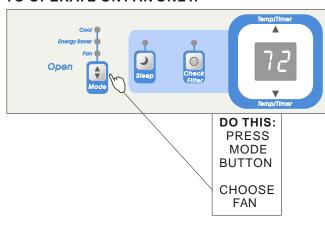


#### YOU WILL SEE:




#### LIGHT ON

**NOTE:** Use this function only when cooling is not desired, such as for room air circulation or to exhaust stale air. You can choose any fan speed you prefer. During this function, the display will show the actual room temperature, not the set temperature as in the cooling mode.

#### TO USE THE ENERGY SAVER **FEATURE:**

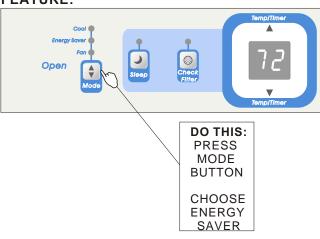

#### YOU WILL SEE:

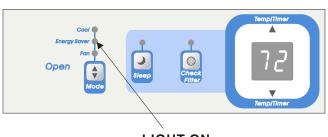

**LIGHT ON** 

NOTE: In this mode, the fan will continue to run for 3 minutes after the compressor shuts off. The fan then cycles on for 2 minutes at 10 minute intervals until the room temperature is above the set temperature, at which time the compressor turns back on and cooling starts.






URE:

### Air Conditioner features

(continued)

#### TO TURNUNIT OFF:

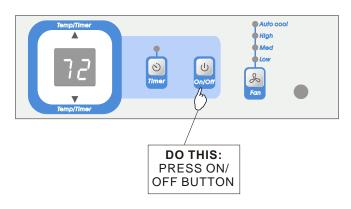

#### YOU WILL SEE:



#### ADDITIONAL THINGS YOU SHOULD KNOW

Now that you have mastered the operating procedure, here are more features in your control that you should become

- familiar with.

  The "Cool" circuit has an automatic 3 minute time delayed start if the unit is turned off and on quickly. This prevents overheating of the compressor and possible circuit breaker tripping. The fan will continue to run during this time.
- The control will maintain the settemperature within 2°F, between 60°F and 90°F degrees.
- The control is capable of displaying temperature in degrees Fahrenheit or degrees Celsius. To convert from one to the other and back, press and hold the "TEMP/TIMER" Up ( ▲ ) and Down ( ▼ ) buttons together for 3 seconds.

#### **EXHAUST CONTROL**




This Exhaust Control allows the air conditioner to either recirculate inside air (CLOSED) or exhaust air to the outside (OPEN).

The CLOSED position is used when maximum cooling is desired. It may also be used for air recirculation without cooling when the air conditioner is set in any FAN position.


The OPEN position removes stale air from the room and exhausts it to the outside. Fresh air is drawn in through normal passages in the home.

#### **4-WAY LOUVERS**

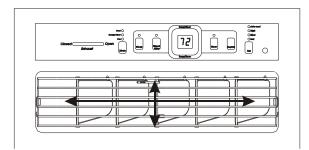

The 4-Way air directional louvers allow you to direct air flow up or down, left or right throughout the room as needed.

# Care and Cleaning:

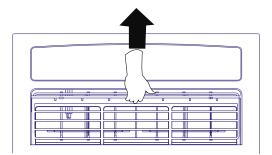

Clean your air conditioner occasionally to keep it looking new. Be sure to unplug the unit before cleaning to prevent shock or fire hazards:

#### Air Filter Cleaning

The air filter should be checked at least once a month to see if cleaning is necessary. Trapped particles in the filter can build up and cause an accumulation of frost on the cooling coils.

- · Grasp the filter by the center and pull up and out.
- Wash the filter using liquid dishwashing detergent and warm water. Rinse filter thoroughly. Gently shake excess water from the filter. Be sure filter is thoroughly dry before replacing.
- Or, instead of washing you may vacuum the filter clean.

#### **Cabinet Cleaning**

- Be sure to unplug the air conditioner to prevent shock or fire hazard. The cabinet and front may be dusted with an oil-free cloth or washed with a cloth dampened in a solution of warm water and mild liquid dishwashing detergent. Rinse thoroughly and wipe dry.
- Never use harsh cleaner, wax or polish on the cabinet front.
- Be sure to wring excess water from the cloth before wiping around the controls. Excess water in or around the controls may cause damage to the air conditioner.
- Plug in air conditioner.

#### Winter Storage

If you plan to store the air conditioner during the winter, remove it carefully from the window according to the installation instructions. Coverit with plastic or return it to the original carton.

NOTE: To prevent rustor electrical connetions from being damaged, store air conditioner in an upright position and in a dry place.

Avoid Service Checklist	Before calling forservice, review this list. It may save you time and expense. This list includes common occurrences that are not the result of defective workmanship or materials in this appliance	
OCCURRENCE	SOLUTION	
Air conditioner will not Operate.	Wall plug disconnected. Push plug firmly into wall outlet.	
operate.	Current device tripped. Preset RESET button.	
	House fuse blown or circuit breaker tripped. Replace fuse with time delay type or reset circuit breaker.	
	Control is OFF. Turn control On and set to desired FAN or COOL setting.	
	Unit turned off and on too quickly. Turn unit off and wait 3 minutes before restarting.	
Air from unit does not feel cold enough.	Room temperature below 60°F (15°C). Cooling may not occur until room temperature rises above 60°F (15°C).	
	Temperature sensor touching cold coil, located behind air filter. Straighten away from coil.	
	Reset to a lower temperature.  Compressor shut-off by changing modes. Wait approximately 3 minutes, and listen for compressor to restart when set in the COOL mode.	
Air conditioner cooling, but room is too warm- ice	Outdoor temperature below 60° F(15°C). To defrost the coil, set mode to FAN position.	
forming on cooling coil behind decorative front.	Air filter may be dirty. Clean filter. Refer to Care and Cleaning section. To defrost, set mode to FAN ONLY.	
	Temperature is too lowfor night-time cooling. To defrost the coil, set to FAN ONLY mode. Then, set temperature to a higher number.	
Air conditioner cooling, but room is too warm-NO ice	Dirty air filter-air restricted. Clean air filter. Refer to Care and Cleaning section.  Temperature is too high. Set temperature to a lower number.	
forming on cooling coil behind decorative front.	Exhaust set at OPEN position. Set exhaust at CLOSED position for maximum cooling.	
	Air direction louvers positioned improperly. Position louvers for better air distribution.	
	Front of unitis blocked by drapes, blinds, furniture, etc restricts air distribution. Clear blockage in front of unit.	
	Doors, windows, registers, etc, open-cold air escapes. Close doors, windows, registers, etc.	
	Unit recently turned on in hotroom, allow additional time to remove "stored heat" from walls, ceiling, floor and furniture.	
Air conditioner turns on	Dirty air filter- air restricted. Clean air filter.	
and off rapidly.	Outside temperature extremely hot. Set FAN speed to a faster setting to bring air past cooling coils more frequently.	
Noise when unitis cooling	Air movement sound. This is normal. If tooloud, set to a slower FAN setting.	
	Sound of fanhitting water-moisture removal system. This is normal when humidity is high. Close doors windows and registers.	
	Window vibration-poor installation. Refer to installation instructions or check with installer.	
Water dripping INSIDE when unit is cooling.	Improper installation. Tilt air conditioner slightly to the outside to allow water drainage. Refer to installation instructions - check with installer.	
Water dripping OUTSIDE when unit is cooling.	Unit removing large quantity of moisture from humid room. This is normal during excessively humid days.	
Room too cold.	Setting too low. Increase temperature setting.	

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com