

INSTALL INSTRUCTIONS C-TCB-31

2004-2007 FORD F-150 (EXCLUDING HERITAGE)

TOOLS REQUIRED:

Standard Socket Set
Open-end Wrench Set

Ratcheting Wrench

HARDWARE:

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	5/16-18 x 1" Hex head bolt	GSM33012
2	5/16" Flat washers	GSM31006
1	5/16-18 Nylock Nut	GSM30017

SUB ASSEMBLY:


1. Identify hardware and components.
2. Remove inner and outer seat base bolts on passenger side front seat.

INSTALLATION:

1. POSITION C-TCB-31:

- Lean seat back and slide C-TCB-31 Base between floor of vehicle and seat base on inner bolt.
- Screw in factory seat base inner bolt and hand tighten at this time.
- Slide cross brace under passenger seat base outer bolt.
- Screw in factory seat base outer bolt and hand tighten at this time.
- Bolt cross brace to tab on square tube of Base using 5/16-18 x 1" Hex head bolt, washers and Nylock nut.
- Tighten all bolts at this time.

Note: It is recommended to mount C-TCB-31 base as far under seat base as possible.

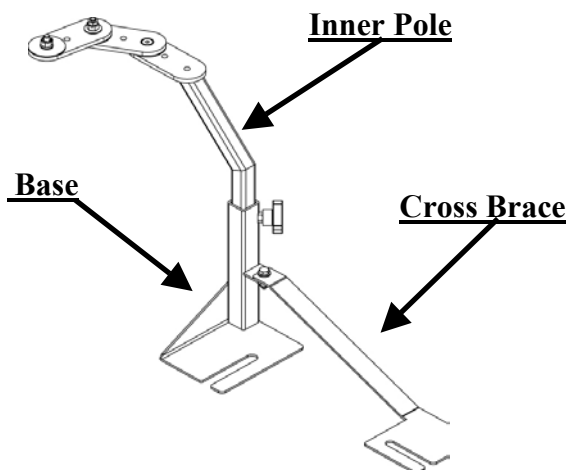

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>