



HP recommends
Windows Vista® Business

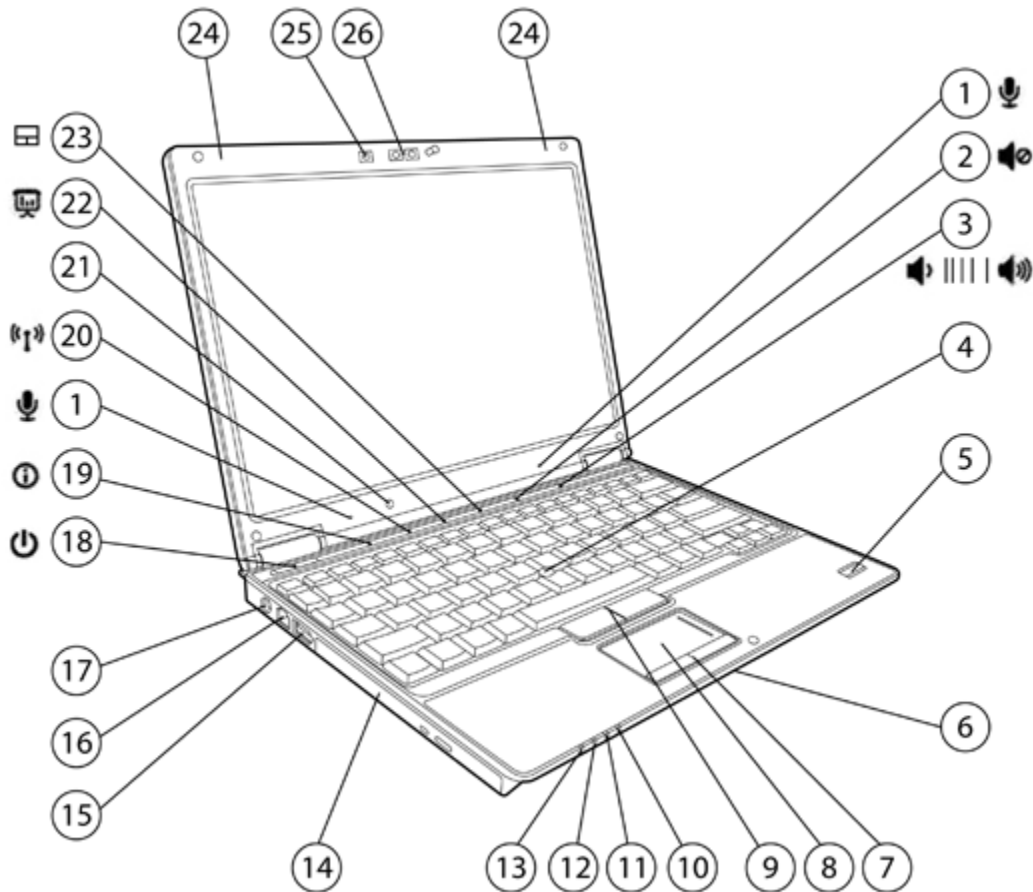


- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Dual-microphone array 2. Volume mute button with LED indicator 3. Volume scroll zone with up/down LED indicators 4. Pointstick 5. HP Fingerprint Sensor 6. Speaker 7. Touchpad buttons 8. Touchpad with scroll zone 9. Pointstick buttons 10. Hard drive / optical drive activity / HP 3D DriveGuard LED 11. Battery charging LED 12. Power/standby LED 13. Wireless on/off LED | <ul style="list-style-type: none"> 14. Optional optical drive available with 1.8-in internal storage, or additional USB 2.0 port available without optical drive 15. USB 2.0 Port (powered on select models) 16. RJ-11/modem port 17. Power connector 18. Power button with LED 19. HP Info / HP QuickLook button with LED indicator 20. Wireless on/off button with LED indicator 21. Ambient Light Sensor 22. HP Presentation button with LED indicator 23. Touchpad on/off button 24. Two WLAN/WWAN combo antennas 25. Optional 2 MP Webcam with LED 26. HP NightLight and on/off button |
|--|--|

Overview

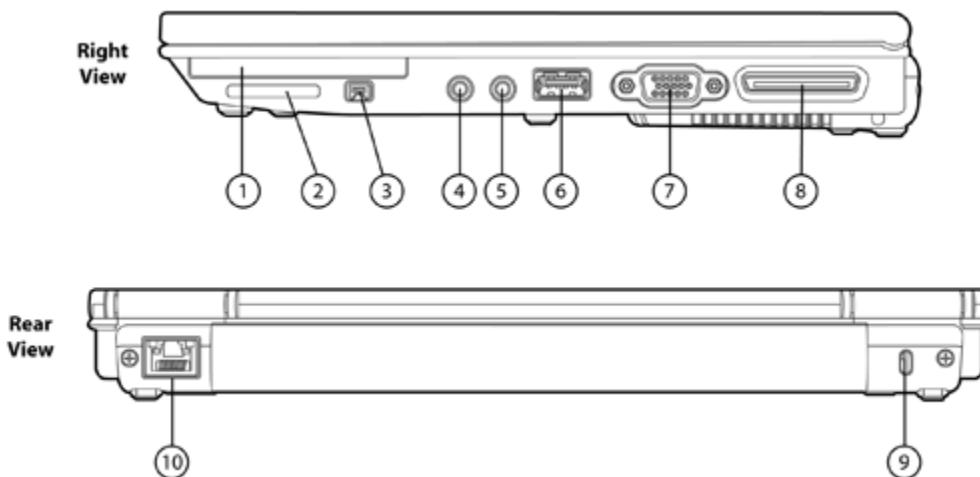

- | | |
|------------------------------|-----------------------------------|
| 1. ExpressCard/54 slot | 6. USB 2.0 port |
| 2. Secure Digital (SD) slot | 7. VGA/external monitor connector |
| 3. IEEE 1394a port | 8. Docking connector |
| 4. Stereo headphone/line out | 9. Kensington Lock slot |
| 5. Stereo microphone in | 10. RJ-45/Ethernet port |

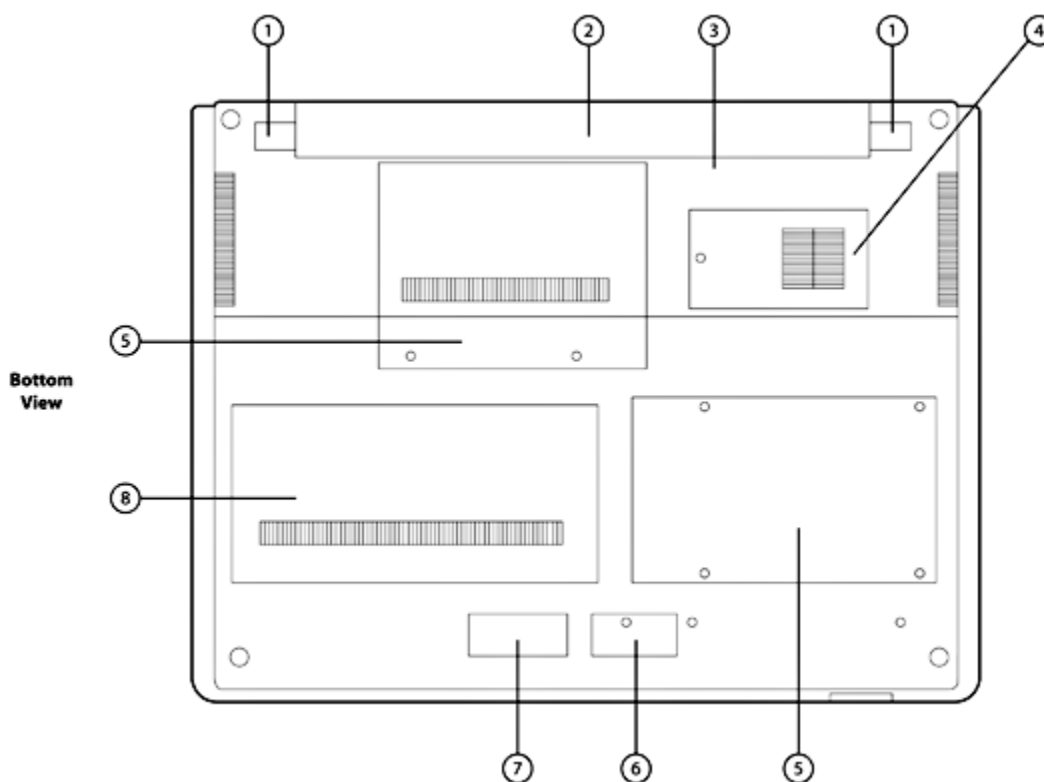

- | | |
|---|---------------------------------------|
| 1. Battery release latch | 5. Hard drive bay |
| 2. Battery bay | 6. Bluetooth compartment |
| 3. SIM slot for WWAN (select models) - inside battery bay | 7. Speaker |
| 4. WWAN module compartment | 8. Memory module and WLAN compartment |

Overview

At A Glance

- Genuine Windows Vista Business 32, Genuine Windows Vista Home Basic, Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed, or FreeDOS
- Starting at 3.19lb/1.45 kg and 0.99-inch/25.2 mm thin at front
- Business Rugged – designed to meet the military standard Mil-Std-810F for drop, shock, vibration, sand and dust, humidity, altitude, and high temperature operation*
- Intel® Centrino® 2 with vPro™ technology capable, with Intel Core™2 Duo ULV and LV processors
- Two memory slots support up to 8 GB of 800 MHz DDR2 SDRAM, dual channel memory
- Choice of 1.8-inch or 2.5-inch SMART SATA II hard drive up to 160-GB, protected by HP 3D DriveGuard; or 80 GB 1.8-inch Solid State Drive
- Optional integrated optical drive in models with 1.8-inch hard drive or SSD; additional USB port in models without optical drive
- Enhanced security features including HP ProtectTools, HP SpareKey, HP Fingerprint Sensor, TPM 1.2 Embedded Security Chip**, and optional integrated Smart Card Reader
- Optional 2 MP Webcam with Business Card Reader Software
- HP Quicklook 2 for instant access to email, calendar, and contact information
- Dual pointing devices (touchpad with scroll zone and pointstick)
- HP Night Light
- Enhanced reliability with HP DuraCase, HP DuraKeys and HP DuraFinish
- Flexible wireless connectivity options:
 - Integrated HP un2400 EV-DO/HSDPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology
 - Integrated 802.11 a/b/g/draft-n, a/b/g, or b/g wireless LAN module
 - Bluetooth®
- 12.1-inch diagonal Illumi-Lite WXGA display with Ambient Light Sensor and HP Privacy Filter support
- 3-, 6-, and 9-cell battery options
- Connector for HP 2400/2500 Ultra-Light Docking Station
- Integrated Intel Gigabit Network Connection (10/100/1000 NIC)
- Secure Digital (SD) slot

* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

** TPM module disabled where use is restricted by law; for example, Russia and China.

Standard Features

Processors	<p>Intel Core 2 Duo LV Processor SL9400 (1.86 GHz, 6 MB L2 cache, 1066 MHz FSB)*</p> <p>Intel Core 2 Duo LV Processor SL9300 (1.60 GHz, 6 MB L2 cache, 1066 MHz FSB)*</p> <p>Intel Core 2 Duo ULV Processor SU9300 (1.20 GHz, 3 MB L2 cache, 800 MHz FSB)*</p> <p>* Intel's numbering is not a measurement of higher performance.</p> <p>NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.</p>						
<hr/>							
Operating System	<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top; padding-right: 20px;">Preinstalled</td> <td> <p>Genuine Windows Vista Business 32*</p> <p>Genuine Windows Vista Home Basic*</p> <p>Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed*†</p> <p>FreeDOS</p> </td> </tr> <tr> <td style="vertical-align: top; padding-right: 20px;">Supported</td> <td> <p>Genuine Windows Vista Business 64*</p> <p>Genuine Windows Vista Enterprise 32*</p> <p>Genuine Windows Vista Enterprise 64*</p> </td> </tr> <tr> <td style="vertical-align: top; padding-right: 20px;">Certified</td> <td> <p>SuSE Linux Enterprise Desktop 10</p> </td> </tr> </table> <p>* Certain Windows Vista product features require advanced or additional hardware. See: http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx and http://www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor.</p> <p>† Windows Vista Business disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.</p>	Preinstalled	<p>Genuine Windows Vista Business 32*</p> <p>Genuine Windows Vista Home Basic*</p> <p>Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed*†</p> <p>FreeDOS</p>	Supported	<p>Genuine Windows Vista Business 64*</p> <p>Genuine Windows Vista Enterprise 32*</p> <p>Genuine Windows Vista Enterprise 64*</p>	Certified	<p>SuSE Linux Enterprise Desktop 10</p>
Preinstalled	<p>Genuine Windows Vista Business 32*</p> <p>Genuine Windows Vista Home Basic*</p> <p>Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed*†</p> <p>FreeDOS</p>						
Supported	<p>Genuine Windows Vista Business 64*</p> <p>Genuine Windows Vista Enterprise 32*</p> <p>Genuine Windows Vista Enterprise 64*</p>						
Certified	<p>SuSE Linux Enterprise Desktop 10</p>						
<hr/>							
Chipset	<p>Mobile Intel GS45 Express Chipset ICH9M-Enhanced</p>						
<hr/>							
Intel Centrino 2 with vPro technology capable	<p>Intel Centrino 2 with vPro technology is a selectable feature that is available on units configured with an Intel WiFi Link 5100. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (AMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the operating system, isolate infected systems, and update PCs regardless of their power state.</p> <p>*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.</p> <p>NOTE: Some functionality of Intel Centrino 2 and vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Centrino 2 and vPro technology is dependant on 3rd party software providers. Compatibility with future "virtual appliances" and Microsoft Windows Vista operating system is yet to be determined.</p>						

Standard Features

Business Rugged

Meets the military standard Mil-Std-810F* for:

- Drop: Method 516.5 Proc. IV (26 drops from 30")
- Shock: Method 515.5 Proc. I (Functional)
- Vibration: Method 514.5, Proc I, Cat. 20 & 24
- High Temperature: Method 501.4, Proc I & II (140°F/60°C operational)
- Sand and Dust: Method 510.4, Proc. I (Blowing Dust)
- Humidity: Method 507.4 (95% relative humidity)
- Altitude: Method 500.4 Low Pressure, Proc. I & II (15,000 feet operational)

* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

Graphics

Mobile Intel Graphics Media Accelerator 4500MHD, up to 384 MB of shared system memory
Microsoft DirectX 10 (Shader 4.0) and OpenGL 2.0 capable

Display

Internal	12.1-inch diagonal Illumi-Lite WXGA anti-glare (1280 × 800 resolution) Ambient light sensor HP Privacy Filter support
External	Up to 32-bit per pixel color depth VGA port supports resolutions up to 2048 × 1536 at 75 Hz, and lower resolutions at up to 100 Hz NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Memory

Standard	800 MHz DDR2 SDRAM; two slots supporting dual channel memory 1024 MB, 2048 MB, 4096 MB, or 8192 MB
Maximum	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2
Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Communications

Integrated Intel Gigabit Network Connection (10/100/1000 NIC)*
56K V.92 modem**

* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Standard Features

Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Wireless LAN is factory configurable or available as an option to be added later. Mobile Broadband (WWAN) requires Windows Vista Business or Windows XP Professional and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

HP un2400 EV-DO/HSPA Mobile Broadband Module Integrated mobile broadband module with Gobi global mobile Internet technology that provides worldwide connection to both CDMA (EVDO) and UMTS (HSPA) networks.
NOTE: Separately purchased mobile network operator service is required.
Two 850/900/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

All 802.11 integrated wireless LAN options Wi-Fi CERTIFIED*
Cisco Compatible Extensions support
Wired Equivalent Privacy (WEP) support up to 128-bit keys
Wi-Fi Protected Access (WPA) and WPA2 support
802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP
Advanced Encryption Standard (AES) support
Two antennas integrated in the display enclosure

Intel WiFi Link 5100 Integrated support for 802.11 a, b, g, and n draft 2.0*
Up to 300 mbps data rate

Broadcom 4322AGN 802.11 a/b/g/draft-n Wi-Fi Adapter Integrated support for 802.11 a, b, g, and n draft 2.0*
Up to 300 mbps data rate

Broadcom 4312G 802.11 b/g Wi-Fi Adapter Integrated support for 802.11 b and g
Up to 54 mbps data rate

HP Integrated Module with Bluetooth Technology Bluetooth Specification v2.0 compliant with Bluetooth WirelessWorks with a wide range of Bluetooth devices

* The specifications for 802.11 n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled (Intel 802.11 a/b/g only).

Standard Features

Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 mm x 19 mm key pitch (center-to-center spacing), 2.0 mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys.

HP DuraFinish helps protect the finish on the keyboard deck, graphics, and icons from normal wear and tear.

HP Night Light shines directly on keyboard for low-light conditions.

Touch-sensitive controls Touch-sensitive controls provide easy access to the following features: HP Info Center, HP QuickLook, wireless on/off, HP Presentation button, touchpad on/off, volume up, volume down, and mute

Pointing device

Enhanced dual pointing devices:
Touchpad with scroll zone, two pick buttons
and
Pointstick, two pick buttons

Expansion card slots

ExpressCard/54 slot Supports ExpressCard/54 and ExpressCard/34
or
Optional Integrated SmartCard compatible with ISO 7816 compliant Smart Cards
Card Reader (replaces
ExpressCard slot)
Secure Digital slot Supports SD (Secure Digital), MMC (MultiMedia Card)

Storage

Internal Storage Device
80/120 GB 5400 rpm 1.8-inch SMART SATA II Hard Drive
120 GB 5400 rpm 2.5-inch SMART SATA II Hard Drive
160 GB 7200 rpm 2.5-inch SMART SATA II Hard Drive
80 GB 1.8-inch Solid State Drive

NOTE: Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.

HP 3D DriveGuard The hard drive is mounted to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

Optical drives DVD-ROM Drive
(9.5mm SATA) DVD+/-RW SuperMulti DL Drive

NOTE: Optical drive available only with 1.8-inch hard drive or Solid State Drive.

Standard Features

Interfaces	ExpressCard/54 slot	Supports ExpressCard/54 and ExpressCard/34
	Smart Card Reader	Optional (replaces ExpressCard/54 slot)
	External monitor	One – VGA
	1394a	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem	One
	RJ-45/Ethernet	One
	USB 2.0	Two (including one powered USB 2.0 port to support HP External MultiBay II on units without an integrated optical drive) Third USB 2.0 port available without optical drive
	Docking connector	For HP 2400/2500 Ultra-Light Docking Station
	LED status indicators	Sixteen

Audio/Visual

High Definition Audio support w/24-bit DAC
Integrated mono speaker
Integrated dual-microphone array
Touch-sensitive controls for volume up, volume down, and mute
Stereo headphone/line out
Stereo microphone in

Optional 2 MP Webcam with Business Card Reader Software

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- AutoMacro focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

Standard Features

Software	Preinstalled software with Windows Vista or Windows XP	HP Recovery Manager (Vista only) HP Help and Support Center HP QuickLook 2 HP Universal Print Driver HP ProtectTools Security Manager HP Quick Launch Buttons HP Wireless Assistant Microsoft Office Ready with 60-day Office Professional 2007 Trial Edition (select models) PDF Complete Special Edition Intervideo WinDVD – DVD Player Roxio Creator Business (for optional DVD+/-RW and DVD/CD-RW drives) McAfee Total Protection* Microsoft Windows Live Messenger (select models) HP Webcam Software
	Additional software available from the web	HP SoftPaq Download Manager HP Client Manager Software HP Client Management Solutions Java Card Security for HP ProtectTools

* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

HP Recovery Manager	Each Vista unit is shipped with HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 10 GB of the hard drive is reserved for the system recovery software.
---------------------	---

SMBIOS Version 2.4	System Management BIOS, previously known as DMI BIOS, is used to store system management information.
--------------------	---

HP ProtectTools Security Manager	HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are:
----------------------------------	---

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Set-up Wizard for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Java Card Security for HP ProtectTools

Standard Features

Security	Standard Features	<p>HP ProtectTools Security Manager</p> <p>Enhanced Pre-Boot Security</p> <p>HP SpareKey</p> <p>One-Step Logon</p> <p>HP Fingerprint Sensor</p> <p>Integrated Smart Card Reader</p> <p>Configuration Control Hardware</p> <p>Memory Change Alert</p> <p>Ownership Tag</p> <p>Setup Password</p> <p>Power-On Password</p> <p>TPM 1.2 Embedded Security Chip*</p> <p>TPM Enhanced DriveLock*</p> <p>HP Disk Sanitizer</p> <p>HP 3D DriveGuard</p> <p>Kensington Lock Slot</p> <p>Support for Computrace / LoJack for Laptops (must be purchased separately)</p>
	Optional Features	<p>Smart Card Reader Compatible with ISO 7816 compliant Smart (replaces ExpressCard/54 Cards slot)</p> <p>HP Privacy Filter Narrows viewing area so that screen data is visible only to persons directly in front of the monitor</p>

* TPM module disabled where use is restricted by law; for example, Russia and China.
 For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

Power Supply	<p>External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included.</p> <p>Total length including external AC adapter is 12 feet (3.66 meter).</p> <p>HP Fast Charge*</p> <p>* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 9 cell primary batteries.</p>
--------------	---

Battery	<p>Primary Battery 3-cell (31 WHr) high capacity Lithium-Ion</p> <p> 6-cell (55 WHr) high capacity Lithium-Ion</p> <p> 9-cell (83 WHr) high capacity Lithium-Ion</p> <p>Battery Fuel Gauge LEDs 6-cell high capacity and 9-cell high capacity</p>
---------	---

Standard Features

Battery Life

	Intel Core 2 Duo ULV Processor	Intel Core 2 Duo LV Processor
3-cell Primary Battery	Up to 4 hours and 30 minutes	Up to 4 hours and 30 minutes
6-cell Primary Battery	Up to 8 hours and 45 minutes	Up to 8 hours and 15 minutes
9-cell Primary Battery	Up to 13 hours and 30 minutes	Up to 12 hours and 45 minutes

NOTE: The listed battery life measurements were taken on models running Microsoft Windows XP Professional. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time Up to 1 week

Power Conservation Supports enhanced Intel SpeedStep technology with Intel Core 2 Duo ULV processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)
Intel Display Power Saving technology
Hibernation
Standby
ACPI compliance

Docking (optional) HP 2400/2500 Ultra-Light Docking Station

Service and Support HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.
NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Select Model(s) HP's Global Product Offer includes Global Series Preconfigured (GS-P) and Configurable (GS-C) products. GPO delivers globally consistent products, services, and solutions with End-of-Life (EOL) transition management. These products reduce IT complexity, lower management costs, increase productivity, and simplify product transitions.

Standard Features

2530p FV879AW#xxx Global SKU (see exceptions below)	Processor	Intel Core 2 Duo LV Processor SL9400 (1.86 GHz, 6 MB L2 cache, 1066 MHz FSB)
FV880AW#xxx (for Latin America, Australia, New Zealand, and Singapore)	Intel Centrino 2 Pro processor technology	Enabled
NOTE: Components may vary based on local regulatory requirements	Operating System	Genuine Windows Vista Business 32 with Office Ready
	System Memory	2048 MB 800 MHz DDR2 (1 DIMM)
	Hard Drive	120 GB 5400 rpm 1.8" SMART SATA II
	Optical Drive	DVD+/-RW SuperMulti DL Drive
	Display	12.1-inch diagonal Illumi-Lite WXGA anti-glare
	Graphics	Mobile Intel GMA 4500MHD
	Webcam	No
	Audio	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	Communications	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	Integrated Wireless	Intel WiFi Link 5100 (802.11 a/b/g/n draft 2.0)
	Integrated Security	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	Pointing Device	Dual pointing devices (Touchpad and Pointstick)
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
Warranty	3/3/0 or 3/3/3 depending on country	

* TPM module disabled where use is restricted by law; for example, Russia.

Options

Memory	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA
Storage	HP Notebooks USB Diskette Drive	DC361B
	HP 250GB Pocket Media Drive	FE477AA
MultiBay II Storage (9.5-mm) NOTE: Requires HP External MultiBay II	HP MultiBay II DVD-ROM Drive	PA849A
	HP MultiBay II DVD+/-RW SuperMulti DL Drive	PA851A
Expansion Solutions	HP 2400/2500 Ultra-Light Docking Station	EQ773AA#xxx
	HP Standard Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
	HP External MultiBay II	PA509A#xxx
Communications	Intel WiFi Link 5300	KM591AA#xxx
	HP un2400 EVDO/HSUPA Mobile Broadband Module	FN556AA
Power	HP 65W Smart AC Adapter	ED494AA#xxx
	HP 90W Smart Auto Adapter	ED493AA
	HP 90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	65W Smart AC/Auto/Air Combo Adapter	ED993AA#xxx
	HP 3-Cell Li-Ion Primary Battery	RW556AA
	HP 6-Cell Li-Ion Primary Battery	EH767AA
	HP 9-Cell Li-Ion Primary Battery	EH768AA
	HP 2500 Series 9-cell Primary Battery	KU529AA
	HP 1-bay Battery Charging Station	RW635AA#xxx
	HP 5-bay Battery Charging Station	RW636AA#ABA
	Battery Adapter Kit	RW640AA
Carrying Cases	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA

Options

Security	HP ExpressCard Smart Card Reader with Java Card	AJ451AA
	HP ProtectTools Java Card – 10 units	EL348AA
	HP/Kensington MicroSaver Security Lock	PC766A
	HP Privacy Filter	AJ356AA

Input/Output Devices	HP USB Keyboard & Mouse Bundle	RC465AA#xxx
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA

Memory

800-MHz DDR2 SDRAM

Two DIMM slots supporting dual channel memory

DIMM sizes supported: 1024 MB, 2048 MB, and 4096 MB

- Standard Memory
- 1024 MB (1024 MB x 1)
 - 2048 MB (2048 MB x 1)
 - 4096 MB (4096 MB x 1 or 2048 MB x 2)

Optional Memory Upgrades Support for up to 8192 MB of memory with the installation of optional DDR2 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
8192 MB	4096 MB	4096 MB

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Memory Upgrades	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA

Storage

Optical Drive Support

Fixed optical drives (95mm SATA)	Quantity Supported	Drive Bay
DVD-ROM Drive	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL Drive	One	Fixed optical drive bay

NOTE: Optical drive available only with 1.8-inch hard drive or Solid State Drive.

Internal Storage Device

1.8-inch SMART SATA II Hard Drives	Quantity Supported	Drive Bay
80-GB 5400 rpm	One	Dedicated hard drive bay
120-GB 5400 rpm	One	Dedicated hard drive bay
- or -		
2.5-inch SMART SATA II Hard Drives		
120-GB 5400 rpm	One	Dedicated hard drive bay
160-GB 7200 rpm	One	Dedicated hard drive bay
- or -		
1.8-inch Solid State Drive		
80 GB Solid State Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	0.99 in (at front) x 11.11 in x 8.44 in 25.2 mm (at front) x 282.3 mm x 214.3 mm
	Weight	Starting from 3.19 lb (1.45 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Starting weight includes 3-cell battery, hard drive, 1 GB memory, 802.11 wireless communications module. Weight varies by configuration and components.	
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	14.0 W
	Max Operating Power	< 65 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Yes
	EPEAT	Gold
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELLIS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes

Technical Specifications

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	Weight	0.62 lb (280 g)		
	Input	100 to 240 VAC		
		Input Efficiency	83% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
	Output	Output power 65W	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
		Humidity	20% to 80%	
	Storage Humidity	10% to 90%		
EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class I, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.			

9-Cell (83 WHr) Lithium-Ion battery	Dimensions (H x W x L)	1.6 x 2.3 x 8.1 in (4.1 x 5.9 x 20.6 cm)		
	Weight	1.07 lb (0.488 kg)		
	Cells/Type	9-cell Lithium-Ion		
	Energy	Watt-hour Capacity	83 WHr	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF mode or Standby	3 to 4 hours	
		System ON	4 to 5 hours (depending on system power consumption)	
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

Technical Specifications

6-Cell (55 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.3 x 8.1 in (2.1 x 5.9 x 20.6 cm)	
	Weight	0.73 lb (0.332 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Watt-hour Capacity	55 WHr
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

Displays

12.1-inch Illumi-Lite WXGA anti-glare	Active Area (W x H)	10.3 x 6.4 in (26.1 x 16.3 cm)		
	Diagonal Size	12.1 in (30.7 cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	300:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	200 nit (typical)		
	Pixel Resolution	Pitch	0.204 mm	
		Format	1280 x 800	
		Configuration	RGB Stripe	
	Backlight	LED		
PPI	125			
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum)			
	30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)			

Internal Storage

Technical Specifications

160 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lb (115 g)
	Capacity	160 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 1.5 ms
	(typical reads, including settling)	Average 11 ms
		Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	312,581,808
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

120 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)
	Capacity	120 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 3 ms
	(typical reads, including settling)	Average 13 ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	234,441,648
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

120 GB 5400 rpm 1.8" SATA Hard Drive	Drive Weight	0.13 lb (62 g)		
	Capacity	120 GB		
	Height	0.31 in (8 mm)		
	Width	2.12 in (54 mm)		
	Interface	ATA-8, SATA 2.5, 1.5 Gb/s		
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)		
	Seek Time (typical reads, including settling)	Single Track	3 ms	
		Average	15 ms	
		Maximum	26 ms	
	Rotational Speed	5400 rpm		
	Logical Blocks	234,441,648		
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security			

80 GB 5400 rpm 1.8" SATA Hard Drive	Drive Weight	0.13 lb (62 g)		
	Capacity	80 GB		
	Height	0.31 in (8 mm)		
	Width	2.12 in (54 mm)		
	Interface	ATA-8, SATA 2.5, 1.5 Gb/s		
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)		
	Seek Time (typical reads, including settling)	Single Track	3 ms	
		Average	15 ms	
		Maximum	26 ms	
	Rotational Speed	5400 rpm		
	Logical Blocks	156,301,488		
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security			

80 GB 1.8" SATA Solid State Drive	Weight	0.08 lb (35 g)		
	Capacity	80 GB		
	Height	0.19 in (5 mm)		
	Width	2.12 in (54 mm)		
	Interface	ATA-8 / SATA 2.6		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		250 MB/s	70 MB/s	
	Logical Blocks	156,301,488		
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]		
	Features	ATA Security		

Technical Specifications

Optical Drives

DVD+/-RW SuperMulti Drive	Access Times	Random	<150 ms CD (typical) <125 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	Up to 3,600 KB/s
		8X DVD	Up to 10,800 KB/s
		24X CD-R	Up to 3,600 KB/s
		10X CD-RW	Up to 1,500 KB/s
		4X DVD+R	Up to 5,400 KB/s
		2.4X DVD+RW	Up to 3,240 KB/s
		4X DVD-R	Up to 5,400 KB/s
		2X DVD-RW	Up to 2,700 KB/s
	2X DVD-RAM	Up to 2,700 KB/s	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM		
Max Media Capacity (read)	8.5 GB		
Max Media Capacity (write)	8.5 GB		
Transport	Tray Loading		

DVD-ROM Drive	Access Times	Random	<120 ms CD (typical) <200 ms DVD (typical)
	Max Data Transfer Rate	24X-CD-ROM	Up to 3,600 KB/s
		8X-DVD	Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
Transport	Tray Loading		

Security



Technical Specifications

HP Fingerprint Sensor	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	32° – 158°F (0° – 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection
		Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

Audio

Hardware	Implementation	ADI1984A High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo

Integrated Mono Speaker	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Integrated Intel Gigabit Ethernet Network Connection (10/100/1000 NIC)	Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
82567LM	Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable)
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x,

Technical Specifications

		clause 30)) Comprehensive diagnostic and configuration software suite Intel Advanced Management Technology (iAMT)
	Interface	PCI Express x1
	NIC Device Driver Name	Intel 82567 Gigabit Network Connection
<hr/>		
V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
	Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

Technical Specifications

HP un2400 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 5 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) – 7.2 Mbps (Download), 2.0Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8Mbps (Upload)
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
	Maximum Power Consumption	2500mA (peak); 1000mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard
	Weight	11.5 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	22° to 140° F (–30° to 60° C) (full RF performance) –22° to 167° F (–30° to 75° C) (reduced RF performance)
	Temperature, Non- operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off – Radio Off; Solid LED On – Radio On
<hr/>		
Intel WiFi Link 5100	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n (draft 2.0)
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with

Technical Specifications

	Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Tested with wireless access points from several major manufacturers (details at: http://www.hp.com/go/notebooks/WLAN/draft-n)
Frequency Band	2.4 GHz and 5 GHz
Antenna Structure	1 transmit; 2 receive (1x2)
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) ²	5 dBm
Output Power (for OFDM) ²	5 dBm
	power varies by data rate) ²
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ⁴	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance
Range	802.11 a – Typical 600 feet – Outdoor Open Area (@6 Mbps) 150 feet – Indoor, Office environment 802.11 b – Typical 1200 feet – Outdoor Open Area (@1 Mbps) 300 feet – Indoor, Office environment 802.11 g – Typical 1200 feet – Outdoor Open Area (@1 Mbps) 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard
Weight	0.013 lb (6 g)

Technical Specifications

Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Microsoft Windows XP	
	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) 	
	Microsoft Windows Vista	
	<ul style="list-style-type: none"> • Microsoft Windows Vista Wireless Network Connection Manager. • Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

Broadcom 4322AGN 802.11a/b/g/draft-n WiFi Adapter	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n (draft 2.0)
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN) Tested with wireless access points from several major manufacturers (details at: http://www.hp.com/go/notebooks/WLAN/draft-n)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz band	

Technical Specifications

Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM	
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17 dBm	
Output Power (for OFDM)	5 dBm	
	power varies by data rate) ²	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	270 Mbps: -66dBm, 162 Mbps: -72 dBm, 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -94 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility:	

Technical Specifications

- Microsoft Windows XP Wireless Network Connection Manager
- Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)

Microsoft Windows Vista

- Microsoft Windows Vista Wireless Network Connection Manager
- Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.

LED Activity LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 4312G 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN) Tested with wireless access points from several major manufacturers (details at: http://www.hp.com/go/notebooks/WLAN/draft-n)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture	Ad-hoc (Peer to Peer)
	Models	Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK) ²	17 dBm

Technical Specifications

Output Power (for OFDM)	5 dBm power varies by data rate) ²	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none"> • Microsoft Windows Vista Wireless Network Connection Manager • Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11 b (CCK modulation) and a packet error rate of 10% for 802.11 a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

Technical Specifications

HP Integrated Module with Bluetooth Technology	Bluetooth Specification 2.0 Compliant
Wireless Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
OS Support	Microsoft Windows XP Professional and Home Microsoft Windows 2000
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software) Serial Port Profile (SPP)* Dial-Up Networking (DUN)* Generic Object Exchange Profile (GOEP) Object Push Profile (OPP)*

Technical Specifications

File Transfer Profile (FTP)
 Synchronization Profile (SYNC)
 Hard Copy Cable Replacement (HCRP)*
 Personal Area Networking Profile (PAN)*
 Human Interface Device Profile (HID)*
 FAX Profile (FAX)
 Basic Imaging Profile (BIP)
 Headset Profile (HSP)
 Hands Free Profile (HFP)
 Advanced Audio Distribution Profile (A2DP)

* indicates the profile is also supported by Microsoft Windows XP SP2

Eco Data

Eco-Label Certifications This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- Taiwan Green Mark
- IT ECO declaration
- EPEAT - Gold

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	7.134 W	7.41 W	7.03 W
Sleep (Energy Star low power mode)	1.573 W	1.652 W	1.583 W
Off	0.579 W	0.643 W	0.579 W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	24 BTU/hr	25 BTU/hr	24 BTU/hr
Sleep	5 BTU/hr	6 BTU/hr	5 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions
 (in accordance with
 ISO 7779 and ISO
 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.5	20
Fixed Disk (random writes)	2.7	27

Technical Specifications

System fan is usually off except when charging the battery

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000 ppm by weight.

The battery type and chemistry used in the product is:
CR2032 (coin cell), Lithium

Additional information:

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: www.epeat.net

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 91.8% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Polyethylene low density 13 g
- Internal:
 - Corrugated 458 g
 - EPE-Expanded Polyethylene 64 g
- The EPE foam packaging material is made from 100% recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

Technical Specifications

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment (http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Technical Specifications

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard
Corporate Environmental
Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2009 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core 2 Duo is a registered trademark or trademark of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>